

Features integral front skirting, armrests & factory installed tile flange on 3 sides.


R7236IS


72.25" x 36.25" x 21"

GENERAL SPECIFICATIONS:

Installation: Alcove Material: Acrylic Plumbed Weight: 150 lbs / 68 kg Soaker Weight: 125 lbs / 57 kg Average Fill: 45 gal to above jet level Maximum Fill: 90 gal to overflow

NOTE: Filling this tub to the maximum may require an above average size or dedicated water heater.

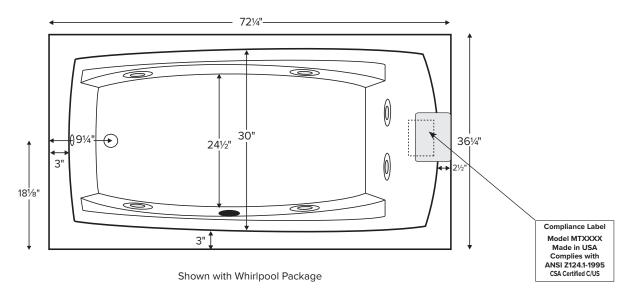

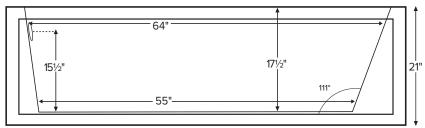

ELECTRICAL SPECIFICATIONS

Required Electrical Service - 110 Volt Air Bath or Whirlpool - 1-15 amp GFCI Soaker - Inline Heater - 1-15 amp GFCI Air Bath - Inline Heater - 1-15 amp GFCI Whirlpool - Inline Heater - 1-15 amp GFCI

CSA Certified C/US; ANSI Z124.1 CSA Certified C/US; ANSI 112.19.7

IMPORTANT ORDERING & INSTALLATION INFORMATION:

- Before ordering or installing, please consider future access to all equipment.
- Must specify left- or right-hand drain when ordering.
- Tubs equipped with hydrotherapy components have a removable front panel.
- Please measure tub on-site before building tub decking.
- Use proper bedding compound to fully level and support tub.
- · Tubs equipped with an air bath or a pre-leveled foam base are designed to rest on the floor without bedding compound, provided the floor is flat and level.
- · Jet, pump & blower locations are predetermined and cannot be changed.
- · Suction and control locations may vary.

- Belove discarding the Crate, the Kilon accessories that may be packaged inside.
 All product measurements are ±1/2".
 Specifications and configurations are subject to change without notice.
 Measurements herein supersede all others published prior to publication date below.

Before discarding tub crate, check for accessories that may be packaged inside

| PACKAGE | PACKAGE CONTENTS | PART # |
|-----------|---|----------|
| Soaker | Soaking bath - No jets. Integral front skirt, 3-sided integral tile flange and textured bottom. | R7236ISS |
| Air Bath | 12 air jets, heated air blower, pre-leveled foam base, textured bottom, integral front skirt and 3-sided tile flange. pre-leveled foam base increases overall tub height 2"-3" | R7236ISA |
| Whirlpool | 6 point-massage jets, 1-bhp pump, integral front skirt, 3-sided integral tile flange and textured bottom. | R7236ISW |

| OPTIONS (must be ordered at time of purchase) | | |
|--|--|--|
| Color Upgrade: Biscuit (RCOLOR) | | |
| Inline Heater For Whirlpool (RHTI) Heater with Recirculating Pump for Soaker & Air Bath (RHTISOAK) | | |
| ACCESSORIES | | |
| Lift and Turn Drain & Overflow Chrome (RWOC) Brushed Nickel (RWOBN) White (RWOW) | | |
| Pillows Soft Pillow White (RPSW) Black (RPSB) Roll-Up Pilow Light Aqua (RPRUC) Black (RPRUB) | | |
| INSTALLATION OPTIONS (must be ordered at time of purchase) | | |
| Pre-Leveled Foam Base (included with all airbaths) 5' Tubs (RPLFOAM) 5.5' & 6' Tubs (RPLFOAM2) | | |



Front view of the integral skirt.