

CODE NUMBER

3315158BT

DESCRIPTION

Battery Power Supply, Back-Check Tee, Polished Chrome Finish, 2.2 gpm, Laminar Spray, Infrared Sensor, Optima® Battery-Powered Wall-Mounted Gooseneck Body Faucet.

DETAILS

• Flow Rate: 2.2 gpm (8 Lpm) (2.2GPM)

Spray Type: Laminar (LAM)
 Spout Type: Surgical Bend (S)
 Sensor Type: Infrared (IR)
 Mounting Type: Single Hole ()

• Power Supply: Battery (BAT)

• Temperature Mixer: Back-Check Tee (TEE)

Finish: Polished Chrome (CP)
Factory Default Timeout: 30s
Factory Default GPC: 1.1

FEATURES

Commercial Grade Faucet, ADA Compliant, Cast Brass Spout, Quick Connect Fittings, Integrated Water Shut-off, Wireless Settings Adjustment, On-demand or Metered activation, Hygienic Line Flush, Water Usage and Battery Strength Reporting, Self-adapting Sensor

ELECTRICAL SPECIFICATIONS

Battery Life: 3 years 8,000 cycles/month
 Optional power harvesting significantly extends service life

Sensor Range: 8"-10" (203-254mm)
Timeout Adjustment Settings: 30s

POWER SUPPLY OPTIONS

- 6VDC Plug Adapter (sold separately)*
- 6VDC Ganged Adapter Kit (up to 6 units)(sold separately)*
- 24VAC Box Transformer (up to 3 units)(sold separately)*
- Optional Turbine Energy Harvesting
- * when converting units to hardwired with battery back-up

VIDEOS


Sloan Connect App®



DOWNLOADS

- Optima Smart Faucet Below Deck Installation Instructions
- Faucet Spray Heads Repair and Maintenance Guide
- ETF-500/500-S and EBF-550/550-S Below Deck Repair and Maintenance Guide
- Additional Downloads





COMPLIANCES & CERTIFICATIONS



ASME

















(ADA Compliant, ASME A112.18.1 Compliant, cUPC Certified, UPC Certified, UPC Low Lead Compliant, cUPC Low Lead Compliant, EPD, HPD, Proposition 65, TAS, WELL Building Standard)

RECOMMENDED SPECIFICATION

Faucet shall include cast brass body, quick-connect fittings, twist-off/shut-off solenoid assembly, removable battery cartridge, flexible power supply and allow adjustment of settings wirelessly via Apple or Android smartphones.

NOTES

All information contained within this document subject to change without notice.

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com



OPTIMA® SENSOR FAUCET EBF-550-BAT-TEE-CP-2.2GPM-LAM-IR-S-FCT

Looking for other variations of the EBF-550 product? View the general spec sheet with all options.

Find a matching soap dispenser for this faucet. Find a compatible sink for this faucet.

WARRANTY


3 Year

Single Inlet Filter Fitting Kit with Below Deck Thermostatic Mixing Valve (BDT)



Double Inlet Filter Fitting

ROUGH-IN

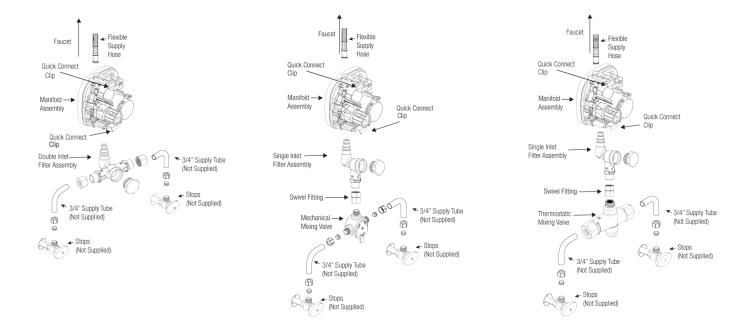

Single Inlet Filter Fitting Kit with Below Deck Manual Mixing Valve (BDM)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131 Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com