

#### **CODE NUMBER**

3315191BT

#### DESCRIPTION

4" Trim Plate, Battery Power Supply, Below Deck Thermostatic Mixing Valve, Polished Chrome Finish, 1.5 gpm, Shower Head Spray, Infrared Sensor, Optima® Battery-Powered Deck-Mounted Gooseneck Body Faucet.

#### **DETAILS**

Flow Rate: 1.5 gpm (6 Lpm) (1.5GPM)Spray Type: Shower Head (SHR)

Spout Type: Surgical Bend (S)
Sensor Type: Infrared (IR)
Mounting Type: Single Hole ()
Trim Plate: 4" (102mm) (4)

• Power Supply: Battery (BAT)

• Temperature Mixer: Below Deck Thermostatic Mixing Valve (BDT)

Finish: Polished Chrome (CP)
 Factory Default Timeout: 30s
 Factory Default GPC: 0.75

#### **FEATURES**

Commercial Grade Faucet, ADA Compliant, Cast Brass Spout, Quick Connect Fittings, Integrated Water Shut-off, Wireless Settings Adjustment, On-demand or Metered activation, Hygienic Line Flush, Water Usage and Battery Strength Reporting, Self-adapting Sensor

## **ELECTRICAL SPECIFICATIONS**

Battery Life: 3 years 8,000 cycles/month
 Optional power harvesting significantly extends service life

Sensor Range: 8"-10" (203-254mm)
Timeout Adjustment Settings: 30s

## **POWER SUPPLY OPTIONS**

• 6VDC Plug Adapter (sold separately)\*

• 6VDC Ganged Adapter Kit (up to 6 units)(sold separately)\*

• 24VAC Box Transformer (up to 3 units)(sold separately)\*

• Optional Turbine Energy Harvesting

\* when converting units to hardwired with battery back-up

### **VIDEOS**


Sloan Connect App®

Sloan Optima Below Deck Faucet

## **DOWNLOADS**

- Optima Smart Faucet Below Deck Installation Instructions
- Faucet Spray Heads Repair and Maintenance Guide
- ETF-700/700-S and EBF-750/750-S Below Deck Repair and Maintenance Guide
- Trim Plate Guide
- Additional Downloads





## **COMPLIANCES & CERTIFICATIONS**

























(ADA Compliant, ASME A112.18.1 Compliant, ASSE 1070, CEC Compliant, cUPC Certified, UPC Certified, UPC Low Lead Compliant, cUPC Low Lead Compliant, EPD, HPD, WaterSense Listed, Proposition 65, TAS, WELL Building Standard)

## RECOMMENDED SPECIFICATION

Faucet shall include cast brass body, quick-connect fittings, twist-off/shut-off solenoid assembly, removable battery cartridge, flexible power supply and allow adjustment of settings wirelessly via Apple or Android smartphones.

#### NOTES

All information contained within this document subject to change without notice.

Sloan 10500 Seymour Ave, Franklin Park, IL 60131



# OPTIMA® SENSOR FAUCET EBF-750-4-BAT-BDT-CP-1.5GPM-SHR-IR-S-FCT

Looking for other variations of the EBF-750 product? View the general spec sheet with all options.


Find a matching soap dispenser for this faucet. Find a compatible sink for this faucet.

#### **WARRANTY**

3 Year



## **ROUGH-IN**

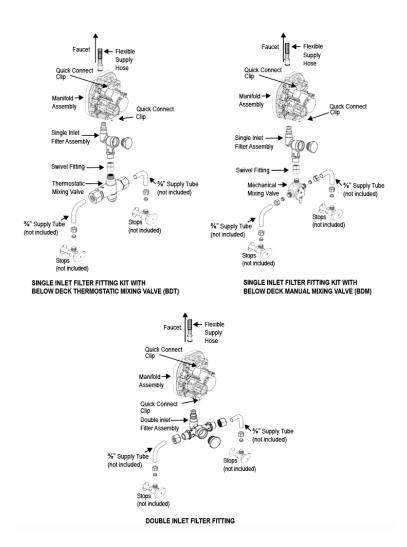

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com