

**CODE NUMBER**

3365659BT

**DESCRIPTION**


Plug Adapter Power Supply, Back-Check Tee, Graphite Finish, 0.5 gpm, Multi-Laminar Spray, Infrared Sensor, Optima® Hardwired-Powered Deck-Mounted Low Integrated Base Body Faucet.

**DETAILS**


- Flow Rate: 0.5 gpm (2 Lpm) (0.5GPM)
- Spray Type: Multi-Laminar (MLM)
- Sensor Type: Infrared (IR)
- Mounting Type: 4" Centerset ( )
- Power Supply: Plug Adapter (PLG)
- Temperature Mixer: Back-Check Tee (TEE)
- Finish: Graphite (GR)
- Factory Default Timeout: 30s
- Factory Default GPC: 0.25

**FEATURES**

Commercial Grade, ADA Compliant, Electronic, Sensor-Activated, Cast Brass 4 Centerset Hand Washing Faucet with the following features:

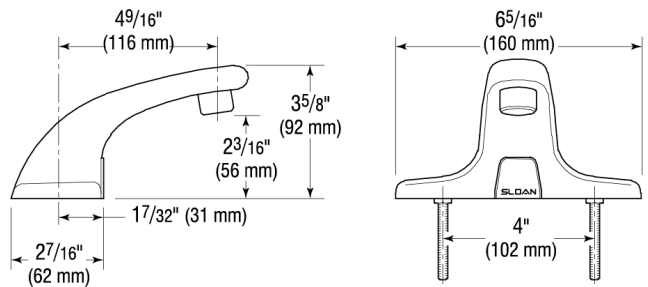

**COMPLIANCES & CERTIFICATIONS**



NYC604.4



(ADA Compliant, CEC Compliant, UL Certified, UPC Low Lead Compliant, cUPC Low Lead Compliant, EPD, GPC 0.25 or less, HPD, NYC604.4, WELL Building Standard)

**RECOMMENDED SPECIFICATION**

Faucet shall include cast brass body, quick-connect fittings, twist-off/shut-off solenoid assembly, removable battery cartridge, flexible power supply and allow adjustment of settings wirelessly via Apple or Android smartphones. PVD Graphite Finish

**NOTES**

All information contained within this document subject to change without notice.

Looking for other variations of the ETF-600 product? [View the general spec sheet with all options.](#)

[Find a matching soap dispenser](#) for this faucet.

[Find a compatible sink](#) for this faucet.

**WARRANTY**

3 Year

- Splash-proof Circuit Control Module
- Sensor Range Adjustment Screw

**Sloan 10500 Seymour Ave, Franklin Park, IL 60131**

Phone: 800.982.5839 • Fax: 800.447.8329 • [sloan.com](http://sloan.com)

- Troubleshooting LED Indicator Lights
- User Friendly Variable Time Out Settings
- Filtered Solenoid Valve with serviceable Strainer Filter
- Vandal Resistant Spray Head with Pressure Compensating Flow Control
- Metal Jacketed Wire Protection for Sensor and Solenoid Leads
- Modular Quick-Release Sensor and Solenoid Connections

#### ELECTRICAL SPECIFICATIONS




- Sensor Range: 4" - 5" (102 - 127mm)

#### POWER SUPPLY OPTIONS

- 6VDC Ganged Adapter Kit (up to 6 units)(sold separately)\*
- 6VDC Plug Adapter (included with PLG models)
- 24VAC Box Transformer (included with BOX models)

\* when converting units to hardwired with battery back-up

#### VIDEOS

-  Sloan Connect App®
-  Sloan Optima Below Deck Faucet
-  PVD Special Finishes

#### DOWNLOADS


- [Optima Smart Faucet Below Deck Installation Instructions](#)
- [Trim Plate Guide](#)
- [Faucet Spray Heads Repair and Maintenance Guide](#)
- [ETF-600/EBF-650 Below Deck Repair and Maintenance Guide](#)
- [Additional Downloads](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • [sloan.com](http://sloan.com)

**ROUGH-IN**

**ETF-600 Faucet with Bak-Chek® Tee  
for Hot and Cold Water Supply**

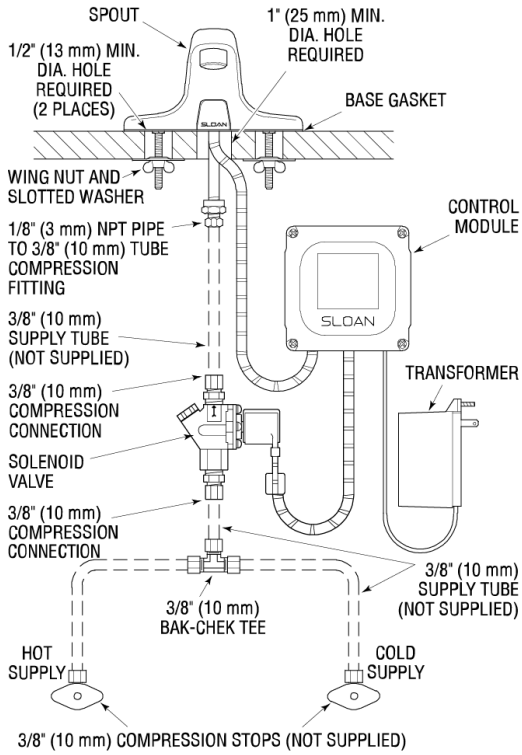

**ETF-600 Faucet with BDM and BDT Variation Mixing Valves  
for Hot and Cold Water Supply**

