# SLOAN.

## CODE NUMBER

10001001

## DESCRIPTION

SU-1009 Urinal and ROYAL 186 Flushometer.

#### COMPONENTS

- Flushometer: Code 3912633
- Urinal: Code 1101009

#### DETAILS

- Flush Volume: 0.125 gpf (0.5 Lpf)
- Nominal Dimensions: 14 <sup>1</sup>/<sub>4</sub>" × 17 <sup>1</sup>/<sub>4</sub>" × 25 <sup>1</sup>/<sub>2</sub>" (362 × 438 × 648mm)

# **FLUSHOMETER FEATURES**

- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- Sweat Solder Adapter with Cover Tube & Cast Wall Flange with Set Screw
- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Diaphragm, Handle Packing and Vacuum Breaker to be molded from PERMEX® Rubber Compound for Chloramine Resistance
- ADA Compliant Metal Oscillating Non-Hold-Open Handle

 $3\prime\!4''$  I.P.S. Screwdriver Bak-Chek® Angle Stop w/ Free Spinning Vandal Resistant Stop Cap

## **FIXTURE FEATURES**

- White Vitreous China
- Washdown flushing action
- Integral flushing rim
- <sup>3</sup>/<sub>4</sub>" I.P.S. top spud inlet
- 2" NPT outlet flange
- Vandal resistant strainer assembly included
- All mounting hardware included
- 100% factory flush tested



# **COMPLIANCES & CERTIFICATIONS**



(ADA Compliant, BAA Compliant, BREEAM Materials Credit, BREEAM Water Credit, CalGreen Compliant, CEC Compliant, cUPC Green Certified, EPD, Green Globes Materials & Resources Credit, Green Globes Water Credit, HPD, LEED Materials & Resources EPD Credit, LEED Materials & Resources HPD Credit, LEED V4 Water Efficiency Credit, Satisfies LEED Credits, WaterSense Listed)

#### DOWNLOADS


- Standard Spud Urinal Installation Instructions
- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide
- Additional Downloads

## NOTES

All information contained within this document subject to change without notice.



SLOAN.

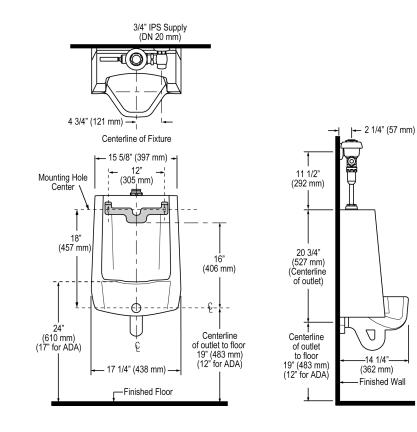

Sloan 10500 Seymour Ave, Franklin Park, IL 60131 Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com