

### **CODE NUMBER**

10061331

### DESCRIPTION

SU-1006 Urinal and SLOAN 186 ESS Flushometer.

### **COMPONENTS**

Flushometer: Code 3772673Urinal: Code 1101006

# **DETAILS**

• Flush Volume: 1.0 gpf (3.8 Lpf)

Nominal Dimensions: 14 ¼" × 17 ¼" × 25 ½" (362 × 438 × 648mm)

# **FLUSHOMETER FEATURES**

- High Chloramine Resistant PERMEX® Synthetic Rubber Diaphragm with Linear Filtered Bypass and Vortex Cleansing ActionTM
- Vacuum Breaker with Flush Connection
- Sweat Solder Adapter with Cover Tube and Cast Wall Flange
- 3/4" I.P.S. Screwdriver Bak-Chek® Angle Stop with Vandal Resistant Stop Cap
- Spud Coupling and Spud Flange for 3/4" Top Spud
- No External Volume Adjustment to Ensure Water Conservation
- OPTIMA® EL-1500 Self-Adaptive Infrared Sensor with Indicator Light
- Diaphragm, Stop Seat and Vacuum Breaker to be molded from PERMEX® rubber compound for Chloramine resistance

# **FIXTURE FEATURES**

- White Vitreous China
- Washdown flushing action
- Integral flushing rim
- ¾" I.P.S. top spud inlet
- 2" NPT outlet flange
- Vandal resistant strainer assembly included
- All mounting hardware included
- 100% factory flush tested



## **COMPLIANCES & CERTIFICATIONS**









(ADA Compliant, cUPC Certified, UL Certified, BAA Compliant)

#### **DOWNLOADS**


- Standard Spud Urinal Installation Instructions
- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide
- Additional Downloads

### **NOTES**

All information contained within this document subject to change without notice.



# **ROUGH-IN**

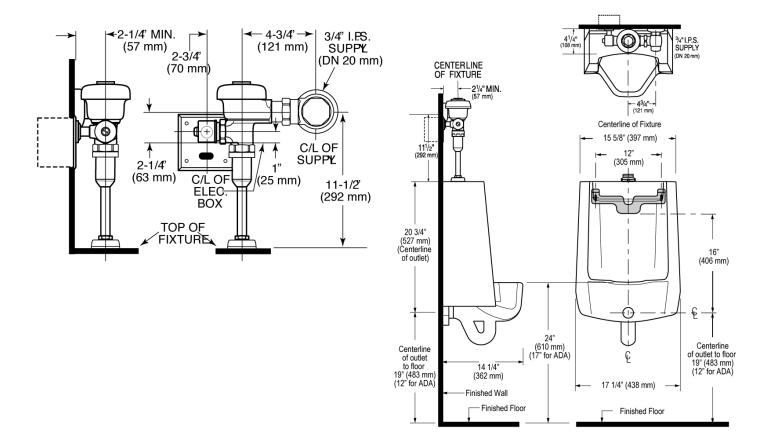

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com