

Naval® Model Flushometer

150 150-1.6



► Description

Concealed Water Closet Flushometer — 1" I.P.S. Outlet for bowls and flushing rim floor drains. Especially suited for harsh water conditions.

► Flush Cycle

- Model 150 (factory set at 3.5 gpf/13.2 Lpf)
 - Model 150-1.6 (factory set at 1.6 gpf/6.0 Lpf)
- Valve Adjustment Range: 1.5 gpf/5.7 Lpf to 7.0 gpf/26.5 Lpf

► Specifications

Quiet, Concealed, Adjustable Piston Type, Rough Brass Closet Flushometer for either left or right hand supply with the following features:

- Metal Non-Hold-Open Push Button
- Self-cleaning Xpelor® Bypass
- 1" I.P.S. Wheel Handle Bak-Chek™ Angle Stop
- Adjustable Tailpiece
- Vacuum Breaker Flush Connection
- 1" female I.P.S. union Outlet (no flush connection)
- Exposed parts Chrome Plated
- Ultra High Copper, Low Zinc Brass Castings for Dezincification and Salt Water Resistance
- Handle Packing, Stop Seat and Vacuum Breaker to be Molded from PERMEX™ Rubber Compound for Chloramine Resistance

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037, ANSI/ASME 112.19.6, and Military Specification V-29193.

► L Dimension

Specify the "L" Dimension for the proper length of the Push Button Assembly and Flush Connection. The "L" Dimension is equal to the Wall Thickness (to the nearest whole inch) plus 2¾" (70 mm).


► Variations

- GJ** Ground Joint Stop and Tailpiece
- L-3** 3" Metal Oscillating Push Button
- WB** For installation with Sloan Easy Access® Wall Box
- XYV** Less Vacuum Breaker
- YB** Sweat Solder Adapter

NOTE: Bak-Chek™ Angle Stop available with 1" Whitworth Thread (please specify).

Ground Joint Stop (GJ) recommended for salt water applications. Vacuum Breaker usually not required when used with non-potable water (specify XYV Variation).

See Accessories Section of the Sloan catalog for details on these and other Flushometer variations.

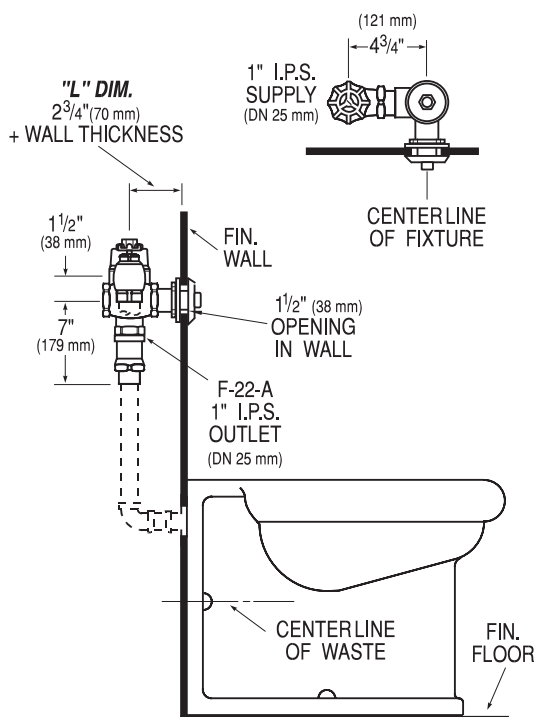

This space for Architect/Engineer approval

The information contained in this document is subject to change without notice.

SLOAN®

Made in the U.S.A.

SLOAN VALVE COMPANY • 10500 SEYMOUR AVE. • FRANKLIN PARK, IL. 60131
Ph: 1-800-9-VALVE-9 or 1-847-671-4300 • Fax: 1-800-447-8329 or 1-847-671-4380
<http://www.sloanvalve.com>