

OPTIONS**Flush Volume**

- 1.0 gpf (3.8 Lpf) (1.0)
- 0.5 gpf (1.9 Lpf) (0.5)
- 1.5 gpf (5.7 Lpf) (1.5)

Finish

- Polished Chrome (CP)
- Brushed Stainless (SF)
- Brushed Nickel (BN)
- Polished Brass (PB)

Water Efficiency

- Low Consumption
- High Efficiency
- Water Saver

Override

- Less (L/OR)

Control Stop

- 1" Straight (E)
- Less (L/STOP)
- 1" (1-IN-STOP)

Vacuum Breaker

- Less (XYV)

Bumper

- Angle Stop (YO)

Special Features

- Less Logo (LL)

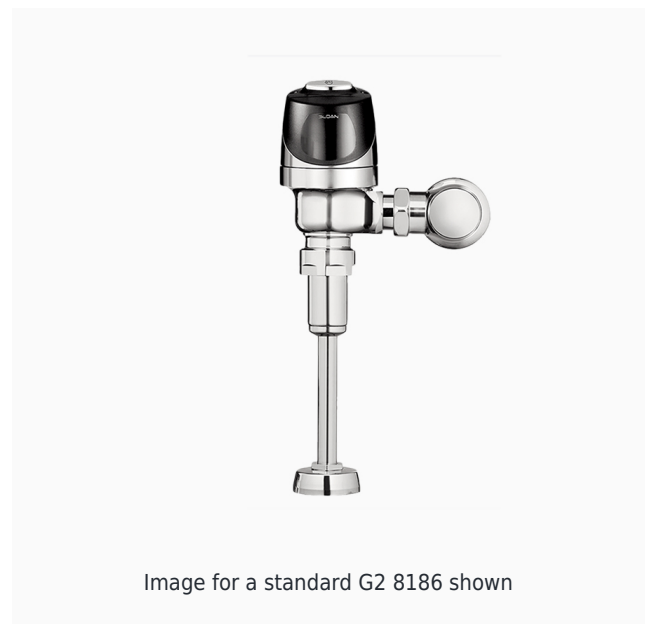
Compliances & Certifications

- ADA Compliant
- BAA Compliant
- cUPC Certified
- UL Certified
- Satisfies LEED Credits
- WaterSense Listed
- cUPC Green Certified
- EPD
- HPD

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

**DESCRIPTION**

G2 Exposed Sensor Flushometer

FEATURES

- ADA-compliant flushometer automatically operates by means of an infrared sensor with multiple-focused, lobular sensing fields for high and low target detection
- Fixed metering bypass and no external volume adjustment to ensure water conservation
- Adjustable tailpiece to accommodate different height requirements
- High copper, low zinc brass castings for dezincification resistance
- Available in 0.5 gpf/1.9 Lpf, low consumption (1.0 gpf/3.8 Lpf), water saver (1.5 gpf/5.7 Lpf), and conventional (3.5 gpf/13.2 Lpf) models
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

DOWNLOADS

- [Optima Plus Valve Installation Instructions](#)
- [G2 Repair and Maintenance Guide](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Sloan Optima Plus Repair and Maintenance Guide](#)
- [Additional Downloads](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com