

OPTIONS**Flush Volume**

- 0.125 gpf (0.5 Lpf) (0.125)
- 0.5 gpf (1.9 Lpf) (0.5)
- 1.0 gpf (3.8 Lpf) (1.0)
- 0.25 gpf (0.9 Lpf) (0.25)
- 1.5 gpf (5.7 Lpf) (1.5)

Finish

- Polished Chrome (CP)
- Brushed Stainless (SF)
- Brushed Nickel (BN)
- Polished Brass (PB)

Water Efficiency

- High Efficiency
- Low Consumption
- Water Saver

Control Stop

- 1" (1-IN-STOP)
- 1" Straight (E)
- Less (L/STOP)

Special Features

- Carbon Offset (CO)

Compliances & Certifications

- ADA Compliant
- BAA Compliant
- cUPC Certified
- Satisfies LEED Credits
- WaterSense Listed
- cUPC Green Certified
- EPD
- HPD
- Carbon Neutral

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

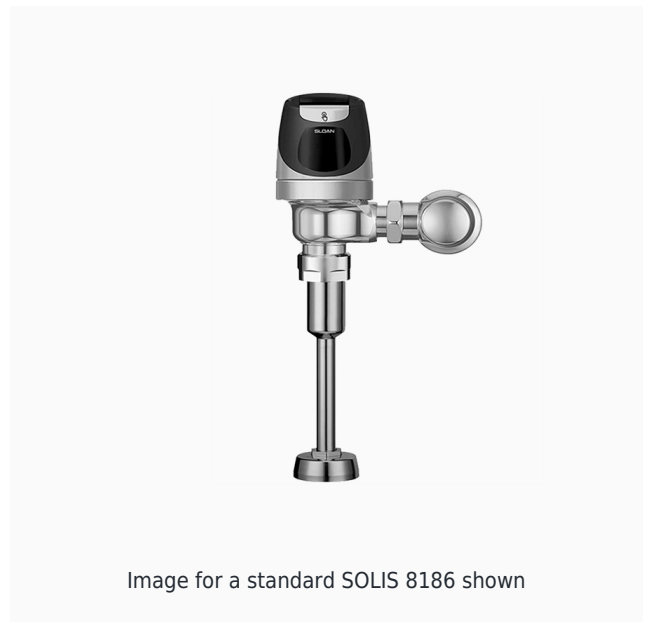


Image for a standard SOLIS 8186 shown

DESCRIPTION

SOLIS® Exposed Sensor Flushometer

FEATURES

- ADA-compliant, exposed, solar-powered, sensor-operated single-flush urinal Flushometer
- Sensor assembly is powered by a solar cell that will harvest power from artificial indoor light (incandescent, fluorescent or LED) and use it as the energy source
- For use on High-Efficiency Urinals that flush with as little as a pint of water
- Automatically operates by means of an infrared sensor with multiple-focused, lobular sensing fields for high and low target detection
- User-friendly, three-second flush delay and Courtesy Flush™ override button
- High Copper, low zinc brass castings for dezincification resistance
- Fixed metering bypass and no external volume adjustment to ensure water conservation
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

DOWNLOADS

- [Solis 8100 Series Installation Instructions](#)
- [Solis 8100 Series \(Spanish\) Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com

- [Concealed Solis Repair and Maintenance Guide](#)
- [Exposed Solis Repair and Maintenance Guide](#)
- [Additional Downloads](#)