

CODE NUMBER

3910531

DESCRIPTION

6.5 gpf, Polished Chrome Finish, Top Spud, Single Flush, Sanigard®, Front of Valve Handle, 1 Offset, Split Ring Pipe Support, Offset Vacuum Breaker, Royal® Exposed Manual Service Sink Flushometer.

DETAILS

Flush Volume: 6.5 gpf (24.6 Lpf)Finish: Polished Chrome (CP)

• Valve: Diaphragm

Valve Body Material: Semi-red Brass

Fixture Type: Service Sink
Fixture Connection: Top Spud
Rough-In Dimension: 24" (610mm)
Spud Coupling: 1 ½" (38mm)
Supply Pipe: 1" (25mm)

• Handle: Sanigard®, Front of Valve (SG-H)

• Vacuum Breaker: Offset (O)

• Offset: 1 (1-OFST)

• Pipe Support: Split Ring (YJ)

FEATURES

- 1" I.P.S. Screwdriver Bak-Chek® Angle Stop with Free Spinning Vandal Resistant Stop Cap
- Sweat Solder Adapter with Cover Tube and Cast Set Screw Wall Flange
- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Diaphragm, Handle Packing and Vacuum Breaker to be molded from PERMEX® Rubber Compound for Chloramine Resistance
- Handle on Front of Valve
- 1" Offset Vacuum Breaker
- ADA Compliant Metal Oscillating Non-Hold-Open Handle



COMPLIANCES & CERTIFICATIONS





(ADA Compliant, BAA Compliant)

RECOMMENDED SPECIFICATION

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi- Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

VALVE OPERATING PRESSURE (FLOWING)

15–80 PSI (103–552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

DOWNLOADS

- Royal Exposed Installation Instructions
- Control Stop Repair and Maintenance Guide
- Flush Connections Flanges Repair and Maintenance Guide
- Tail Piece Repair and Maintenance Guide
- Royal Manual Diaphragm Flushometer Repair and Maintenance Guide
- Additional Downloads

NOTES


All information contained within this document subject to change without notice.

Looking for other variations of the ROYAL 117 product? View the general spec sheet with all options.

Find a compatible urinal for this flushometer.
Find a compatible water closet for this flushometer.



ROUGH-IN

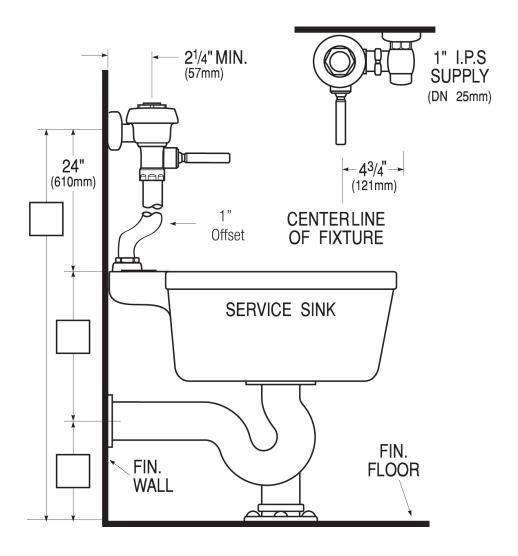

Sloan 10500 Seymour Ave, Franklin Park, IL 60131 Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com