

► **Code Number**

3912726

► **Description**

Exposed high-efficiency urinal Flushometer, for 3/4" top spud high-efficiency urinals. For installations where reclaimed or recycled water is used for flushing.

► **Flush Cycle**

0.125 gpf/0.5 Lpf

► **Specifications**

Quiet, Exposed, Diaphragm Type, Chrome Plated Urinal Flushometer with the following features:

- For Flushing Volume 0.125 and 0.25: Dual Linear Filtered Bypass Diaphragm
- Tailpiece
- High back pressure vacuum breaker flush connection w/ one-piece bottom hex coupling nut
- Spud coupling and flange for 3/4" top spud
- Sweat Solder Adapter w/Cover Tube & Cast Wall Flange w/Set Screw
- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Diaphragm, Handle Packing, Stop Seat and Vacuum Breaker molded from PERMEX Synthetic Rubber Compound for Chloramine Resistance
- High Copper, Low Zinc Brass Castings for Dezincification Resistance
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- Flush accuracy controlled by CID® technology
- 3/4" I.P.S. Screwdriver Bak-Chek® Angle Stop with Vandal Resistant Stop Cap
- Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

► **Variations**

L-C2 Push Button

C Inlet on Left Side of Valve

K - Wheel Handle Stop



H - Inlet on front of valve

► **Accessories (Sold Separately)**

See Accessories Section of the Sloan catalog for available accessories

► **Fixtures**

Consult factory for matching Sloan brand fixture options.

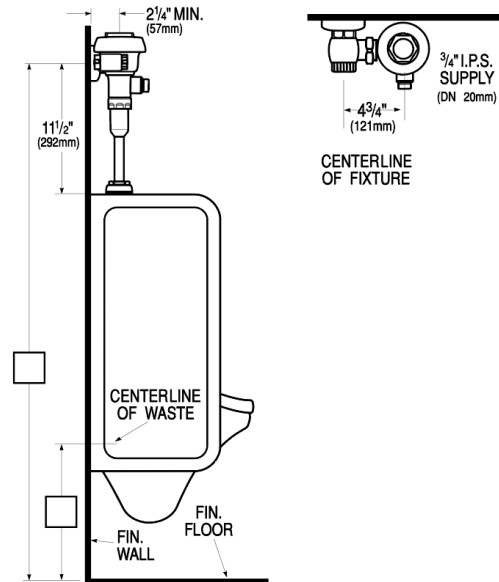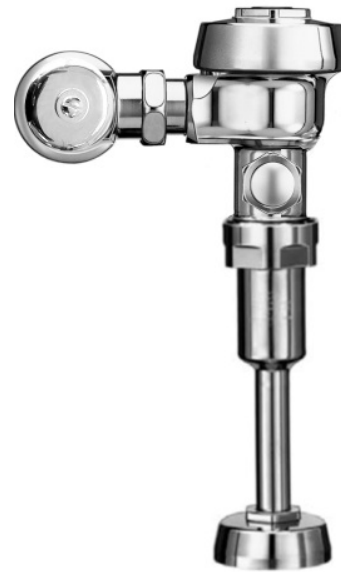

► **Compliance & Certifications**



This space for Architect/Engineer Approval