Sentinel Mark II[®] Thermostatic Diverter Shower Valve

MODELS:

• CPV-T-DV: Thermostatic Diverter Shower Valve

Sweat & Thread Connections

• CPV-T-DV-PXC: Thermostatic Diverter Shower Valve

PEX F1807 Crimp Inlet Connections

• CPV-T-DV-PXE: Thermostatic Diverter Shower Valve

PEX F1960 Cold-Expansion Inlet

Connections

FEATURES:

- Brass body construction
- Four port valve with sweat & thread, PXC or PXE inlet connections (depending on model), and sweat & thread shower and tub outlets
- Thermostatic element and built-in check stops
- Blends hot and cold water to ensure constant and safe temperature thus preventing Scalding via shuttling Thermostatic Element
- Ceramic diverter cartridge allows for transition between two independent settings
- Adjustable temperature limit stop to control maximum temperature setting
- Integral stops allow water shut off for servicing valve
- Supports back-to-back installation
- Includes rough-in template and 1/2" pipe cap

TRIM OPTIONS:

• CPT-1400-P • CPT-10400-P

• CPT-1401 • CPT-24400

• CPT-3401 • CDCPT25401

• CPT-7400-P • CDCPT25403

• CPT-8400-P • CPT-27400

• CPT-8401-P

STANDARDS:

- ASME A112.18.1/CSA B125.1 certified
- ASSE 1016 certified

WARRANTY:

Visit speakman.com for full product warranty information

- 5 Year Limited Warranty (commercial)
- 5 Year Limited Warranty (residential)



CPV-T





CPV-T-PXC




CPV-T-PXE

1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. For ADA mounting locations, consult ADAAG, ANSI A117.1, and state regulations.

Sentinel Mark II® Thermostatic Diverter Shower Valve



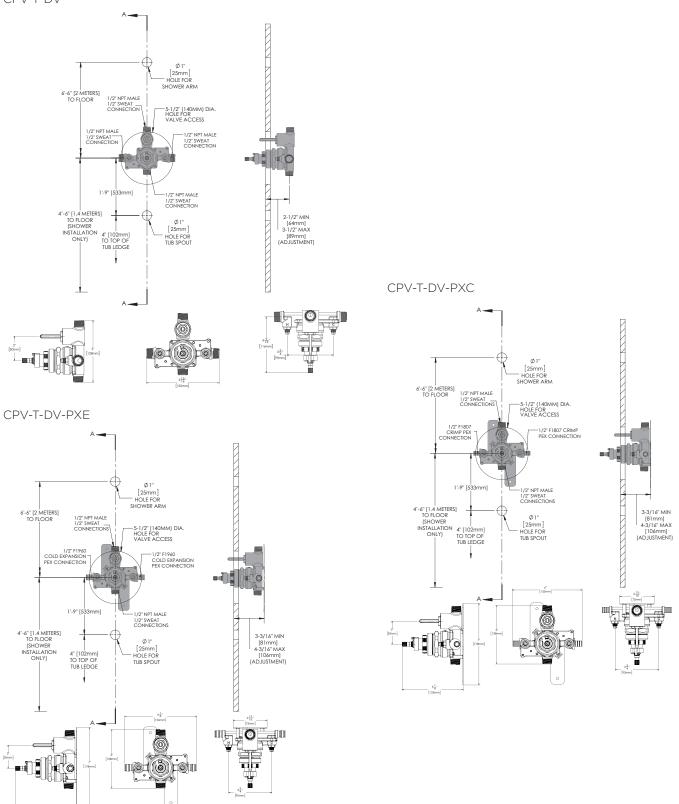

1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. For ADA mounting locations, consult ADAAG, ANSI A117.1, and state regulations.