

Eyesaver® Faucet with Single Lever Control Handle

EYEWASH FEATURES:

- Independent water channel for eyewash
- Single lever cartridge
- Lift handle activation
- (2) Dedicated Optimus® aerated eyewash sprays with flip top dust cap
- 2.0 GPM (7.57 L/min) at 30 PSI flow rate
- Inlet supply 9/16"-24 UNEF Female (3/8" compression)

FAUCET FEATURES:

- Low-lead brass construction
- Swivel spout positioning up to 100 degrees
- 1/4 turn ceramic cartridge
- 1.2 GPM (4.5 L/min) max. flow rate
- Inlet supply 9/16"-24 UNEF Male (3/8" compression)
- Corrosion resistant finish

EYEWASH ADD-ONS:

- A-SEF-NA: Non-aerated eyewash outlets
- SEF-TW: Thermostatic mixing valve for tepid water during eyewash usage

FAUCET ADD-ONS:

- A-SEF-BOLF: 0.5 GPM (1.89 L/min) faucet flow control and 1.5 GPM (5.7 L/min) laminar faucet flow control kit

STANDARDS:

- ANSI/ISEA Z358.1 certified
- ASME A112.18.1/CSA B125.1 certified
- IGC 272 certified
- NSF/ANSI 61 certified
- NSF/ANSI 372 certified
- ADA compliant

WARRANTY:

Visit www.speakman.com for full product warranty information

- 3 Year Limited Warranty



Information continues on next page

**ENSURE YOU ARE ANSI/ISEA Z358.1
Tepid Water Compliant**
by incorporating Speakman's 9.7 GPM
Thermostatic Mixing Valve.




- **STW-370:** Thermostatic Mixing Valve (valve only)
- **SEF-TW:** Thermostatic Mixing Valve with necessary connections for SEF products

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: 02-APRIL 2022

Eyesaver® Faucet with Single Lever Control Handle

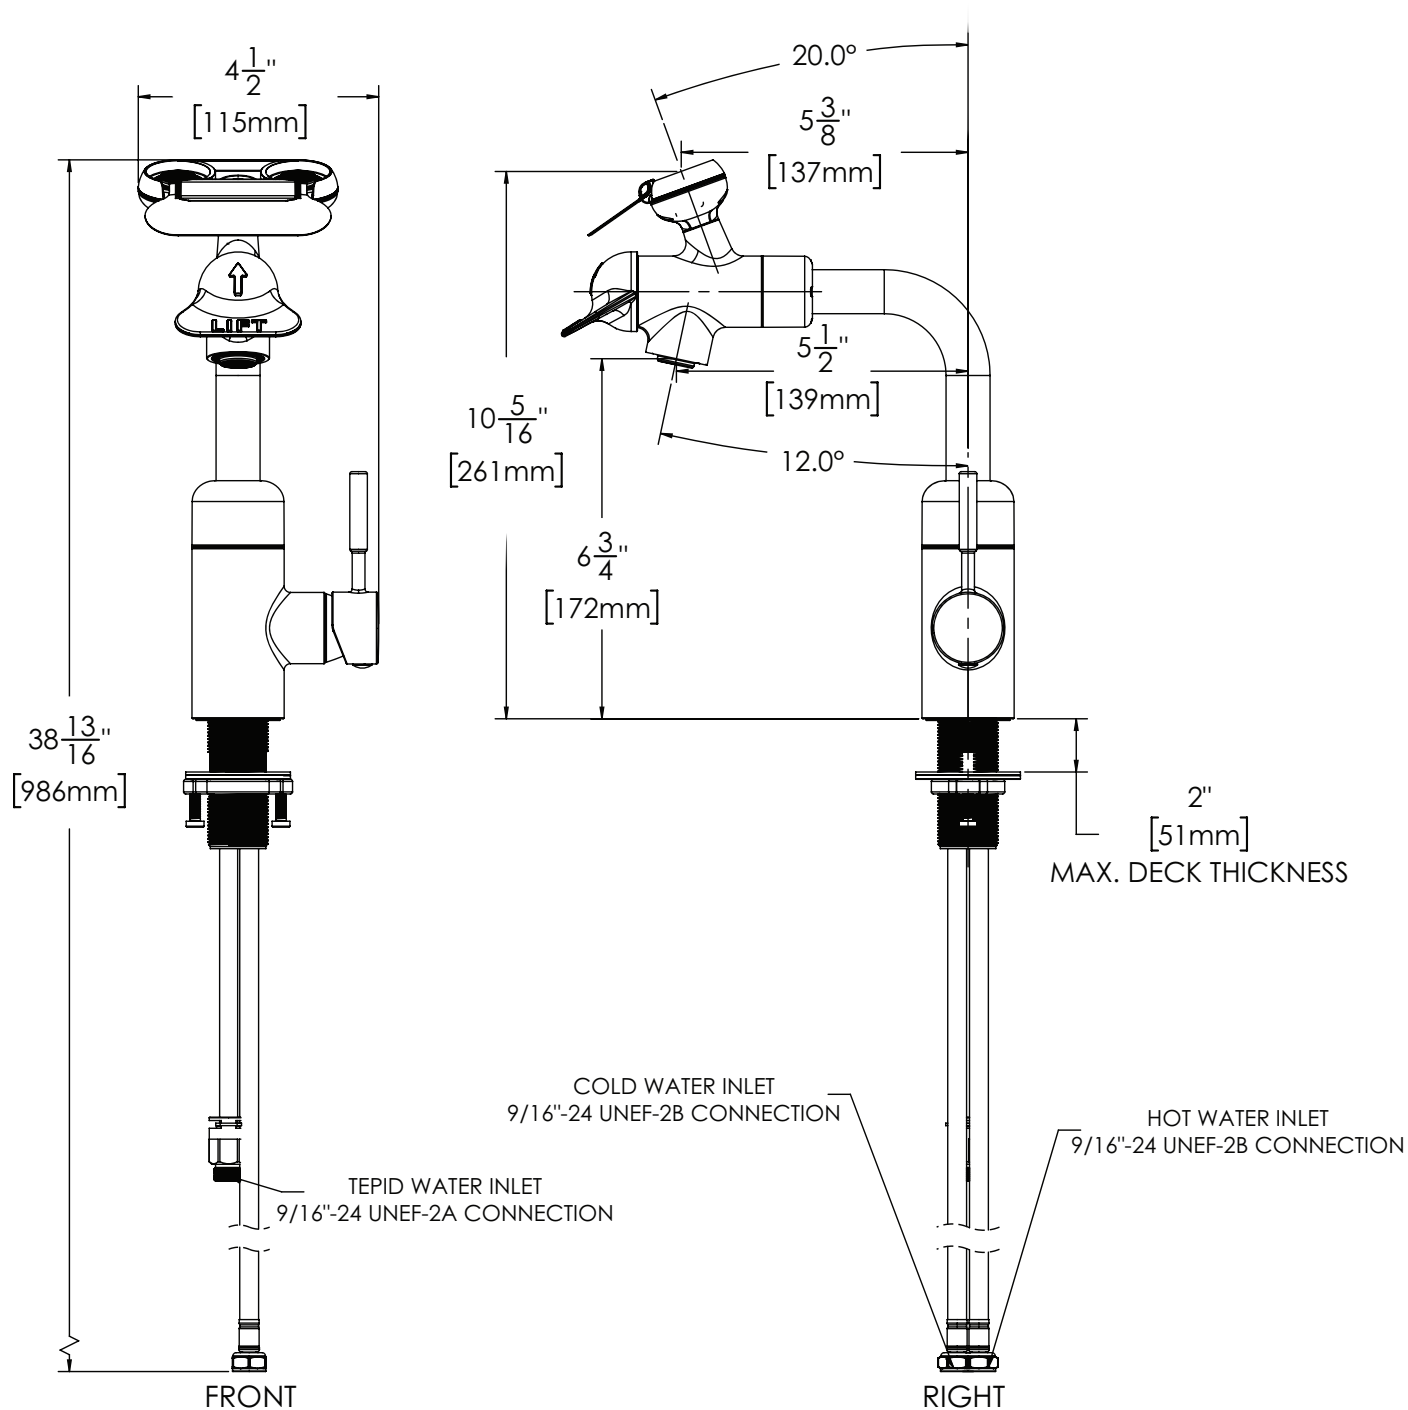

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: 02-APRIL 2022