


DIRECT-VENT FIREPLACES

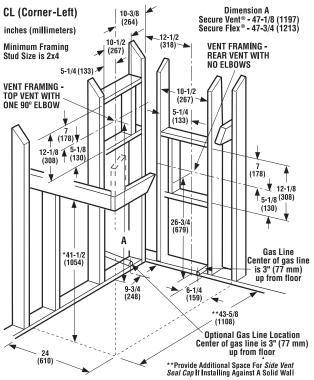




Route a 1/2" (13 mm) gas line to the right side of the appliance as shown


* This dimension can be reduced to 41" (1042 mm). This results in 0" (0 mm) clearance between framing and unit framing spacers. The 41-1/2" (1054 mm) dimension permits easier fireplace installation, if unit is installed after framing is erected.





Inches (millimeters)

NOTE: Unit has a factory-installed vent seal cap and vent cover plate in each flue outlet. The vent seal cap is not shown in this figure.









Inches (millimeters)

NOTE: DIAGRAMS & ILLUSTRATIONS NOT TO SCALE.

Page 1 of 2

P/N 900661-07, REV. NC, 05/2016

Fireplace Dimensions

Superior

Product Reference Information				
Cat. No.	Model	Shipping Weight	Shipping Volume	
F2276	DRT40CLDMN	299 lbs.	42.0 cu.ft.	
F2277	DRT40CLDMP	299 lbs.	42.0 cu.ft.	
F2278	DRT40CLDEN	299 lbs.	42.0 cu.ft.	





Report No. 14-171

These appliances comply with National Safety Standards and are tested and listed by PFS to ANSI Z21.88 (in Canada, CSA-2.33), and CAN/ CGA-2.17-M91, latest editions, in both USA and Canada, as vented gas fireplace heaters.

Combustible Shelf Height - Inches (millimeters) Model Top Vent - with One 90° Elbow Rear Vent - Straight Out the Back Secure Vent® Secure Vent Secure Flex Secure Flex® DRT40CL 41-1/8 (1045) 41-1/8 (1045) 53-7/8 (1368)* 55-5/8 (1413)*


* Includes 3" clearance to combustibles (required above vent components)






Minimum Clearances Inches (millimeters)			
Back & Sides	1/2 (13) 0 (0) from Spacers or Dimples		
Top Spacers	0 (0)		
Floor	0 (0)		
From Bottom of Unit To Ceiling	64 (1626)		
Vent	3 (77) Top* / 1 (26) Sides & Bottom		
Service Clearances - Feet (meters)			
Front, Back & Sides	3 feet (0.9 meters)		

*NOTE: 3" (77 mm) above any horizontal/ inclined vent component.






Vertical Termination Cap SV4.5CGV-1 (rated for high winds and freezing conditions) * Ceiling Firestop/ Spacer (SV4.5VF) **Ceiling Framing** 10-1/2" 10-1/2" Typical (267 mm) Installation Uses 4.5" / 7.5" Secure Vent® Rigid and

NOTE: DIAGRAMS & ILLUSTRATIONS NOT TO SCALE.

Printed in U.S.A. @ 2016 Innovative Hearth Products P/N 900661-07 REV. NC 05/2016





Specifications and clearances are subject to change without notice. Refer to Installation Manual before installation of these appliances for updated dimensions and instructions. Page 2 of 2



Secure Flex® Direct-Vent Components