

# TOTO®

# CST244EF(R)

## Entrada™ Close Coupled Toilet, 1.28GPF

### FEATURES

- E-Max® flushing system, high efficiency (1.28GPF/4.8LPP)
- Elongated bowl
- Universal Height
- ADA compliant
- Close coupled, elongated front bowl and tank set, seat sold separately
- Chrome trip lever
- 12" Rough-in

### MODELS

- CST244EF
- CST244EFR - Right-hand trip lever

### COMPONENTS

- C244EF - Elongated Front Bowl
- ST243E - Tank and cover only - Left hand trip lever (shown in photo)
- ST243ER - Tank and cover only - Right hand trip lever
- SS114 SoftClose® seat (sold separately)

### COLORS/FINISHES

- Standard  
#01 Cotton

### PRODUCT SPECIFICATION

The two-piece, universal height, high efficiency E-Max flushing system toilet shall be 1.28GPF. Toilet shall have high-profile tank, elongated bowl and chrome trip lever. Toilet shall be ADA compliant and universal height. Toilet shall be **TOTO Model CST244EF**\_\_\_\_\_.



**E+** E-Max

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC)
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant (when installed with trip lever located on the approach side)
- Complies with CA Prop 65 warning requirements



# CST244EF(R)


## Entrada™ Close Coupled Toilet, 1.28GPF

### SPECIFICATIONS


- Water Use 1.28 GPF (4.8 LPF)
- Flush System E-Max
- Min. Water Pressure 8 psi (flowing)
- Water Surface 8-3/8" x 10-1/2"
- Trap Diameter 2-1/8"
- Rough-in 12"
- Trap Seal 2-3/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight **C244EF** - 53lbs  
**ST243E(R)** - 24lbs
- Shipping Dimensions **C244EF** - 28-1/2" x 16" W1  
x 10-1/4" W2 x 17-3/4"  
**ST243E(R)** - 16-1/2" x 8-1/4"  
x 15-3/4"

### INSTALLATION NOTES

Back-to-Back Toilet Installations:  
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

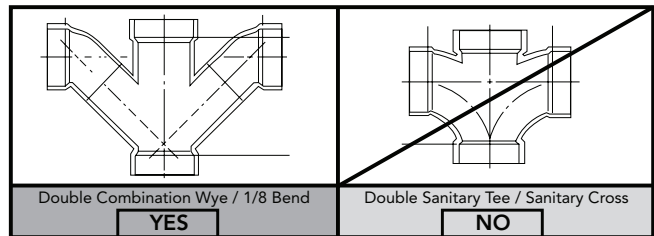

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

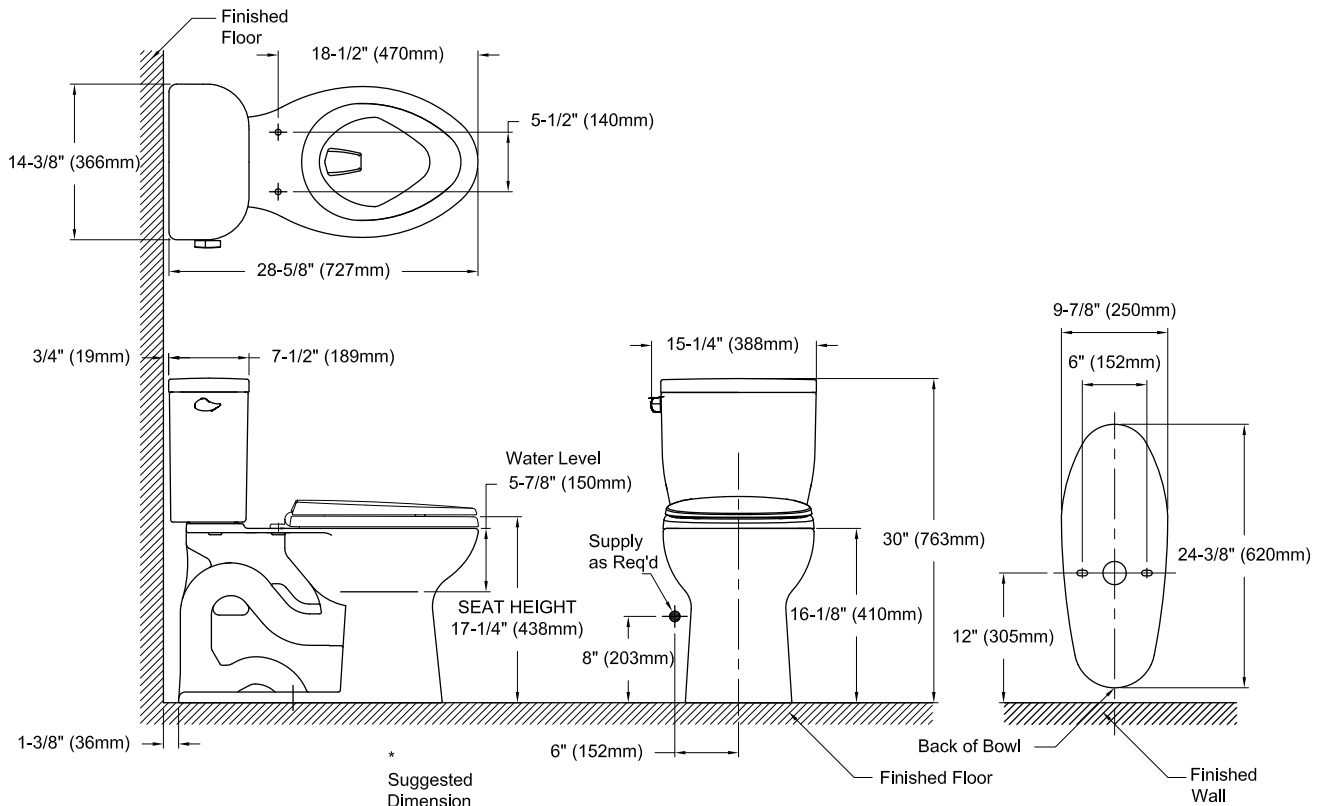

**TOTO**

*These dimensions and specifications are subject to change without notice*