

TOTO® TS200AL51 & TS200AL61

Transitional Collection Series A Single-Spray Showerhead

FEATURES

- WaterSense certified low-flow 2.0 gpm
- Single-spray showerhead
- Easy to clean rubber nozzles reduce scale buildup
- G 1/2" connection

MODELS

- TS200AL51
4-1/2" showerhead
4" diameter spray face
- TS200AL61
5-1/2" showerhead
5" diameter spray face

COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel
- #PN Polished Nickel

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Complies with CA Prop 65 warning requirements



PRODUCT SPECIFICATION

The single-spray showerhead shall have a maximum flow rate of 2.0 gpm (7.6 lpm). TS200AL51 shall have a 4-1/2" showerhead and a 4" diameter spray face. TS200AL61 shall have a 5-1/2" showerhead and a 5" diameter spray face. Product shall have a single spray. Product shall have rubber nozzles to prevent limescale build up. Product shall be TOTO Model TS200AL____ #____.



TS200AL51: Transitional Collection Series A Single-Spray Showerhead 4-1/2"



TS200AL61: Transitional Collection Series A Single-Spray Showerhead 5-1/2"

Please note the following component is sold separately:



TS200N6: Shower Arm 6"

TS200AL51 & TS200AL61



Transitional Collection Series A Single-Spray Showerhead

SPECIFICATIONS


- Warranty: Lifetime Limited Warranty (Residential Use)
One Year (Commercial Use)
- Material: Brass / Plastics
- Shipping Weight: TS200AL51: 0.8 lbs.
TS200AL61: 1.0 lbs.
- Shipping Dimensions: TS200AL51 & TS200AL61:
3-1/2" L x 5-3/4" W x 6-3/4" H
- Maximum Flow Rate: 2.0 gpm (7.6 lpm)

INSTALLATION NOTES

OPTIONAL SHOWERHEAD COMPONENT:
TS200N6: Shower Arm 6" sold separately.

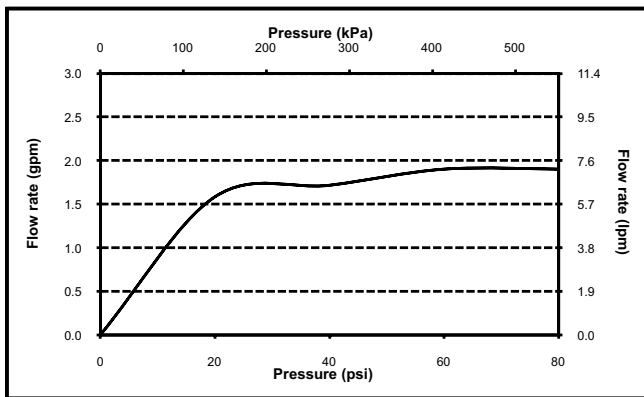

TS200AL51: 4-7/16" (112mm)
TS200AL61: 5-3/8" (136mm)

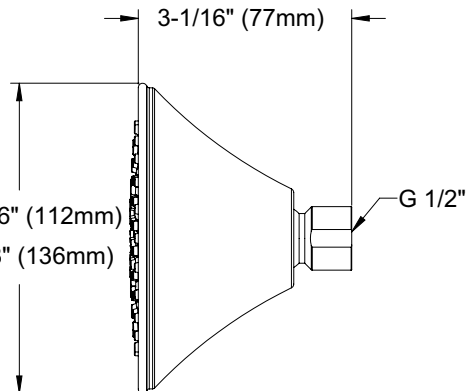

TOTO

These dimensions and specifications are subject to change without notice