TOTO_®

TS300FL55

Traditional Collection Series A Multi-Spray Handshower

FEATURES

- WaterSense certified low-flow 2.0 gpm
- Multifunction showerhead with 5 spray modes Spray
 - Spray & Massage Combo
 - Massage
 - Mist
 - Pause
- 4-1/2" handshower
- 4" diameter spray face
- Easy to clean rubber nozzles reduce scale buildup
- G 1/2" connection

COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel
- #PN Polished Nickel

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others



PRODUCT SPECIFICATION

The multi-spray handshower shall have a maximum flow rate of 2.0 gpm (7.6 lpm). Product shall have a 4-1/2" handshower and a 4" diameter spray face. Product shall have 5 multifunction spray modes. Spray modes shall be spray, spray and massage combo, massage, mist and pause. Product shall have rubber nozzles to prevent limescale build up. Product shall be TOTO Model TS300FL55#____.



TS300FL55: Traditional Collection Series A Multi-Spray Handshower 4-1/2"

Please note the following components are sold separately:



TS101R Wall Outlet



TS101V Handshower Wall-Mount



TS101S Shower Arm Mount



TS101W60 Shower Hose 60"

TS300FL55

Traditional Collection Series A Multi-Spray Handshower

SPECIFICATIONS

- Warranty Lifetime Limited Warranty • (Residential Use)
 - Material


One Year (Commercial Use) Plastics


- Shipping Weight
- 1.3 lbs. Shipping Dimensions
- 4"L x 4-1/4"W x 11-1/4"H Maximum Flow Rate 2.0 gpm (7.6 lpm)

INSTALLATION NOTES

OPTIONAL HANDSHOWER COMPONENTS:

- TS101R: Wall Outlet
- TS101S: Shower Arm Mount
- TS101V: Handshower Wall-Mount
- TS101W60: Shower Hose 60"



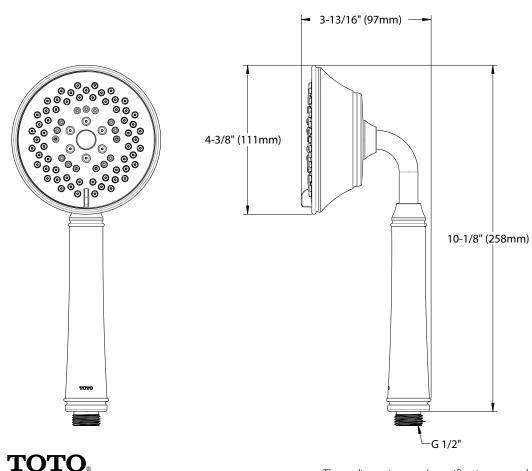

These dimensions and specifications are subject to change without notice

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com