TS400FL55

Transitional Collection Series B Multi-Spray Handshower

FEATURES

- WaterSense certified low-flow 2.0 gpm (7.5 lpm)
- Multifunction showerhead with 5 spray modes
 - Spray
 - Spray & Massage Combo
 - Massage
 - Mist
 - Pause
- 4-1/2" handshower
- 4" diameter spray face
- Easy to clean rubber nozzles reduce scale buildup
- G 1/2" connection

COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel
- #PN Polished Nickel

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), EPA WaterSense,
 State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Complies with CA Prop 65 warning requirements





PRODUCT SPECIFICATION

The mulit-spray handshower shall have a maximum flow rate of 2.0 gpm (7.5 lpm). Product shall have a 4-1/2" handshower and a 4" diameter spray face. Product shall have 5 multifunction spray modes. Spray modes shall be spray, spray and massage combo, massage, mist and pause. Product shall have rubber nozzles to prevent limescale build up. Product shall be TOTO Model TS400FL55#



TS400FL55: Transitional Collection Series B Multi-Spray Handshower 4-1/2"

Please note the following components are sold separately:



TS101R Wall Outlet



TS101S Shower Arm Mount



TS101V Handshower Wall-Mount



TS101W60 Shower Hose 60"

Transitional Collection Series B Multi-Spray Handshower

SPECIFICATIONS

Warranty
 Lifetime Limited Warranty


(Residential Use)

One Year (Commercial Use)

Material ABS Shipping Weight 0.9 lbs.

• Shipping Dimensions 4"L x 4-1/4"W x 11-1/4"H

Maximum Flow Rate 2.0 gpm (7.6 lpm)

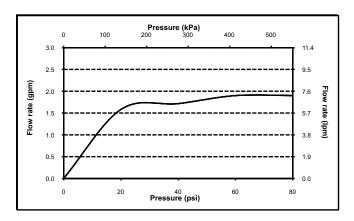

INSTALLATION NOTES


OPTIONAL HANDSHOWER COMPONENTS:


- TS101R: Wall Outlet

- TS101S: Shower Arm Mount

- TS101V: Handshower Wall-Mount

- TS101W60: Shower Hose 60"

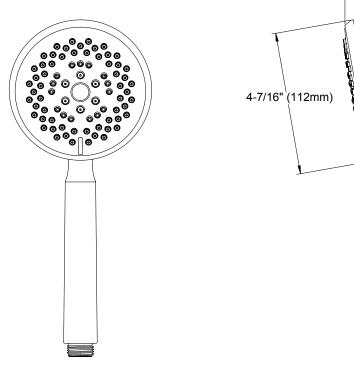

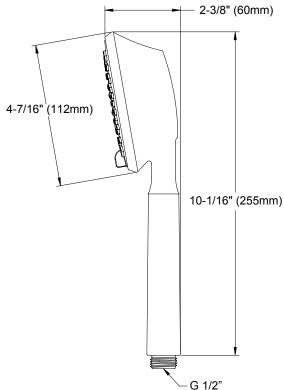

TOTO_®

These dimensions and specifications are subject to change without notice