

# TOTO®

# CST744SF(R).10

## Drake® Close Coupled Toilet, 1.6GPF, 10" Rough-In

### FEATURES

- G-Max® flushing system, low consumption (1.6GPF/6.0LPF)
- Universal Height
- Two-piece design with high-profile tank
- Elongated front bowl and tank set, less seat
- ADA compliant
- Chrome trip lever
- 10" Rough-in, less supply

### MODELS

- CST744SF.10#01  
Elongated bowl, 10" rough-in, less seat
- CST744SFR.10#01  
Same as above with right hand trip lever

### COMPONENTS

- C744EF.10 - Elongated Front Bowl, 10" rough-in
- ST743S - Tank and Cover only - Left-hand trip lever
- ST743SR - Tank and Cover only - Right-hand trip lever
- ST743SBR - Tank and Cover only - Bolt down lid with right-hand trip lever
- SS114 SoftClose® seat (sold separately)
- SC134 seat (sold separately)
- SC534 seat (sold separately)

### COLORS/FINISHES

- Standard  
#01 Cotton

### PRODUCT SPECIFICATION

The two-piece G-Max flushing system toilet shall be 1.6GPF/6.0LPF. Toilet shall be at universal height and be ADA compliant. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever. Toilet shall be TOTO Model CST744SF\_\_\_.10#01.



**G+** G-Max

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1,
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant (when installed with trip lever located on the approach side)
- Complies with CA Prop 65 warning requirements



# CST744SF(R).10

## Drake® Close Coupled Toilet, 1.6GPF


### SPECIFICATIONS

- Water Use 1.6 GPF/6.0LPF
- Flush System G-Max
- Min. Water Pressure 8 psi (static)
- Water Surface 10-5/16" x 7-7/8"
- Trap Diameter 2-1/8"
- Rough-in 10"
- Trap Seal 2-3/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight CT744EF.10 - 48lbs  
ST744S(R) - 32lbs
- Shipping Dimensions CT744EF.10  
29"-L x 15"W1 x 10-1/2"W2  
x 17-1/8"H  
  
ST743S(R)  
18" L x 9" W x 16" H


### INSTALLATION NOTES

#### Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

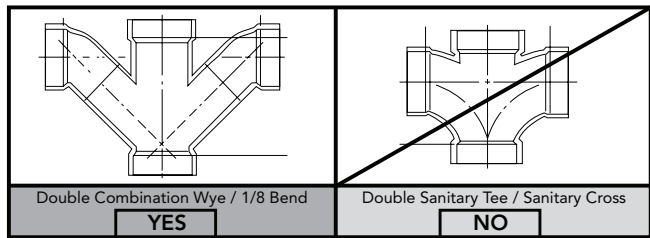

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 10" rough-in distance.

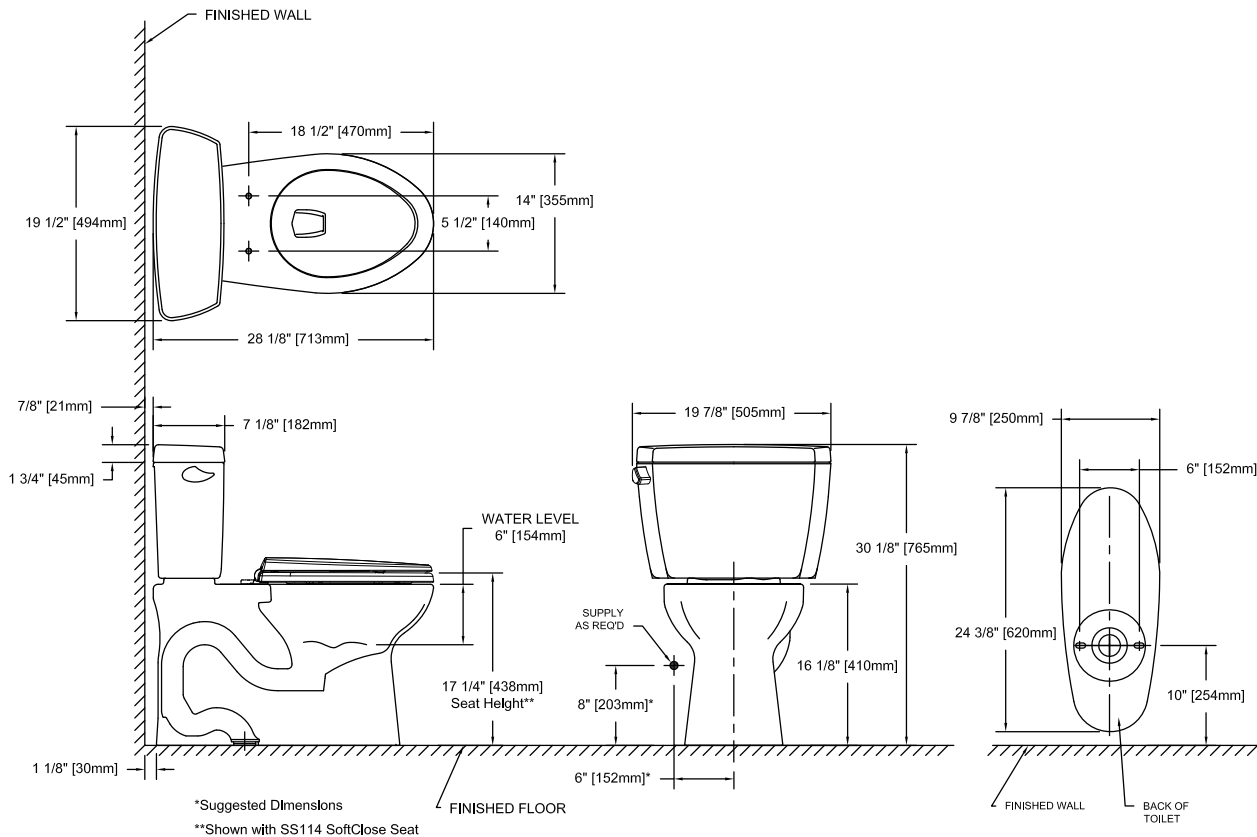

**TOTO®**

*These dimensions and specifications are subject to change without notice*