

## Thermostatic Mixing Valve with Two-Way Diverter Trim - Round

### FEATURES

- For use with MiniUnit™ (TBN01001U) Valve
- Unobtrusive twist assist for a clean aesthetic
- Meets 2018 California water efficiency appliance CEC regulations
- Thin escutcheon at approximately 10 mm
- Temperature control trim with anti-scald safety top
- ASSE certified Safety Thermo™ (SMA) Thermostatic Mixing Valve

### COLORS/FINISHES

- #CP Polished Chrome
- #PN Polished Nickel
- #BN Brushed Nickel

### OPTIONAL ACCESSORIES

- **THP5466#(CP, PN, BN)**  
Thermostatic Mixing Valve ADA Handle - Polished Chrome, Polished Nickel, Brushed Nickel
- **THP5467#(CP, PN, BN)**  
Volume Control/Diverter ADA Handle - Polished Chrome, Polished Nickel, Brushed Nickel

### PRODUCT SPECIFICATION

Product shall be TOTO Model TBV01408U#\_\_\_\_. Product shall require TBN01001U MiniUnit (sold separately). Product shall be a temperature control valve and trim with anti-scald safety stop. Product shall be ASSE certified.



### Safety Thermo™ (SMA)

### CODES/STANDARDS

- Meets or exceeds ASSE 1016/ASME A112.1016/CSA B125.16, ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, CEC and others
- Complies with CA Prop 65 warning requirements



# TBV01408U


## Thermostatic Mixing Valve with Two-Way Diverter Trim - Round

### SPECIFICATIONS


<b>Material</b>	Brass
<b>Warranty</b>	Limited Lifetime for Residential Use One Year for Commercial Use
<b>Shipping Weight</b>	5.9 lbs
<b>Shipping Dimensions</b>	12" x 8-1/2" x 6-3/8"

### INSTALLATION NOTES

Requires TBN01001U MiniUnit (sold separately).

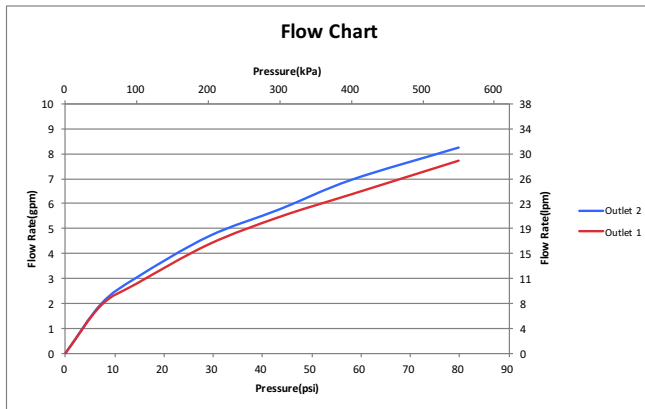

### DIMENSIONS

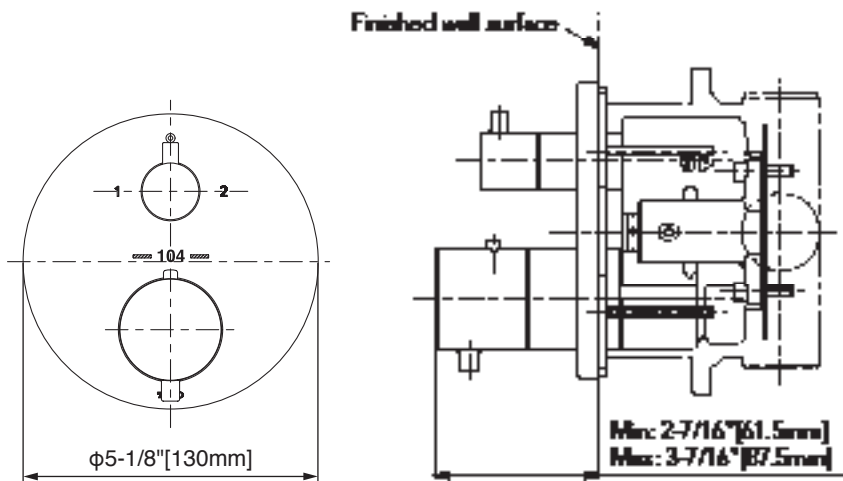

**TOTO**

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

*These dimensions and specifications are subject to change without notice*

#SS-01294 v.01