

Classic Series Aero Rain Shower

FEATURES

- Air injected and pulsating AeroJet+ Technology
- 2.5 gpm (9.5 lpm) maximum flow rate
- 8" diameter spray face
- Rubber nozzles to prevent lime scale build up

COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel
- #PN Polished Nickel



CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others



PRODUCT SPECIFICATION

The shower shall have air injected and pulsating Aero-Jet+ technology. Product shall have 2.5 gpm (9.5 lpm) max flow rate. Product shall have 8" diameter spray face. Product shall have rubber nozzles to prevent lime scale build up. Product shall be TOTO Model TS112BL8#_____.

Please note the following required components are sold separately:



TS110MW16
Shower Arm Wall
Mount



TS110MC6
Shower Arm Ceiling
Mount

SPECIFICATIONS



- Warranty: Lifetime Limited Warranty (Residential Use)
One Year (Commercial Use)
- Material: Brass
- Shipping Weight: 4.8 lbs.
- Shipping Dimensions: 13-1/8" x 14-1/8" x 4-1/4"
- Maximum Flow Rate: 2.5 gpm (9.5 lpm)

INSTALLATION NOTES


Required Components:

- TS110MW16* (Wall Mount Shower Arm)
- TS110MC6* (Ceiling Mount Shower Arm)

*These components are compatible with the following TOTO rain shower products only:
TS111B8, TS111BL8, TS111B12, TS111BL12,
TS112B8, TS112BL8, TS112B12, TS112BL12

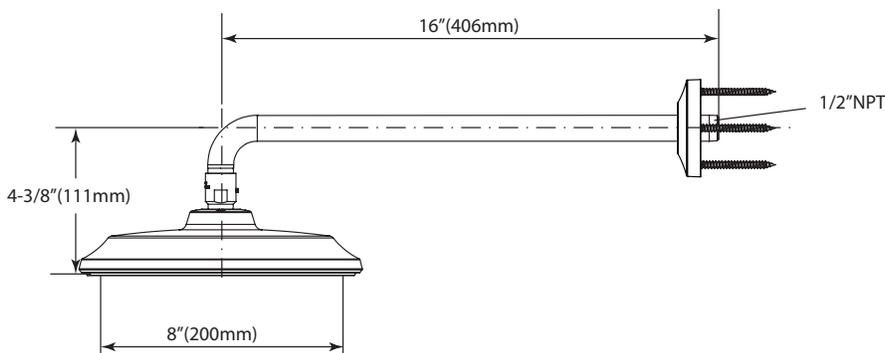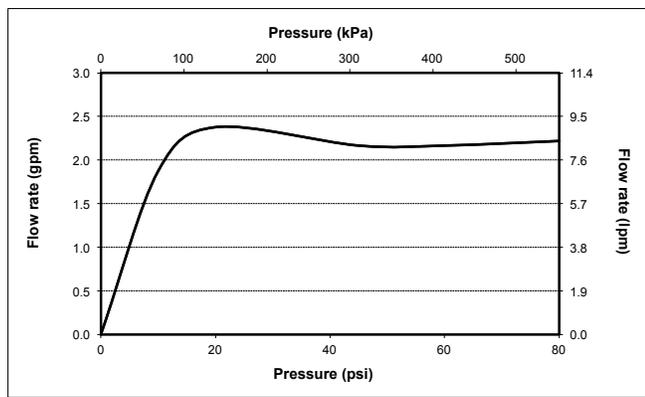

Shown with
TS110MW16

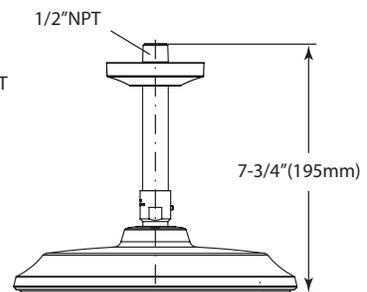

Shown with
TS110MC6