


## FEATURES

- ¼ turn washerless ceramic disc valve cartridges
- Flexible hose connection for 8" to 16" spread installations
- Flow rate 1.2 gpm (4.5 lpm) maximum flow rate
- Solid brass construction
- Listed by IAPMO, CSA, NSF, and other municipalities
- Warranty:
  - Limited lifetime warranty (residential use)
  - One year (commercial use)
- Shipping weight (lbs.) 10
- Shipping dimensions (in.): 29x12x4

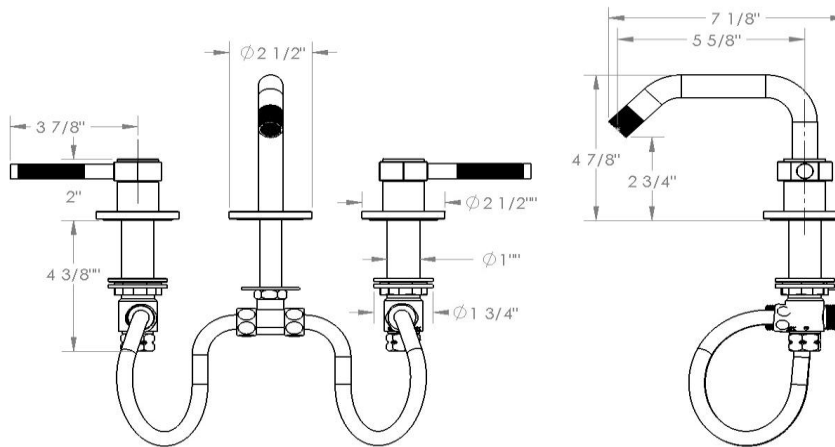


ITEM NO.	PART NUMBER	QTY.
1	111-2-SPT	1
2	NEOPERL PCA PLTT 1.2GPM (44.3060.00001)	1
3	111-2-AERTR-SHLL	1
4	NEOPERL AERTR GSKT TT	1
5	AS568-224 SQUARE	1
6	142-LOCK-NUT	1
7	142-TEE	1
8	142-HRS-SHOE-WSHR	1
9	142-TEE-GSKT	1

## IMPORTANT INSTALLATION INFORMATION


- USE TEFLON TAPE OR PIPE SEALANT FOR THREADED CONNECTIONS
- DO NOT USE PLUMBER'S PUTTY ON ANY OF THE BRASS COMPONENTS  
This will cause the finish to tarnish and void the warranty. A non-corrosive Alkoxy Silicone is recommended.
- DURING SWEATING OF LINES DO NOT OVERHEAT CASTING  
Overheating may cause damage to internal mechanism
- COPPER ADAPTORS MAY BE REQUIRED TO COMPLETE YOUR INSTALLATION

### HANDLE TRIMS


#### Zeze (Code: SP4)

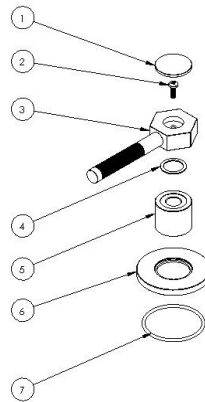

ITEM NO.	PART NUMBER	QTY.
1	SP-1.1-HNDL-CAP	1
2	pan cross head_ai	1
3	SP-1.1-HNDL	1
4	Ø85x.683x.034-PLSTC-WSHR	1
5	SP4-ESC	1
6	SP4-ESC-RING	1
7	AS568 - 135	1

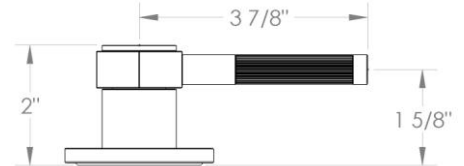

#### Pisacane (Code: SP5)

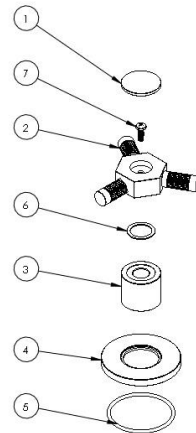

ITEM NO.	PART NUMBER	QTY.
1	SP-1.1-HNDL-CAP	1
2	SP-1.1-HNDL-LVR-TOP	3
3	SP4-ESC	1
4	SP4-ESC-RING	1
5	AS568 - 135	1
6	Ø85x.683x.034-PLSTC-WSHR	1
7	pan cross head_ai	1

