



## FEATURES

- ¼ Turn ceramic disc cartridges
- Hand Shower Flow Rate: 2.0 gpm at 45psi
- Solid Brass Construction
- Warranty:
  - Limited lifetime warranty (residential use)
  - One year (commercial use)
- Some systems may require a remote pressure balance valve

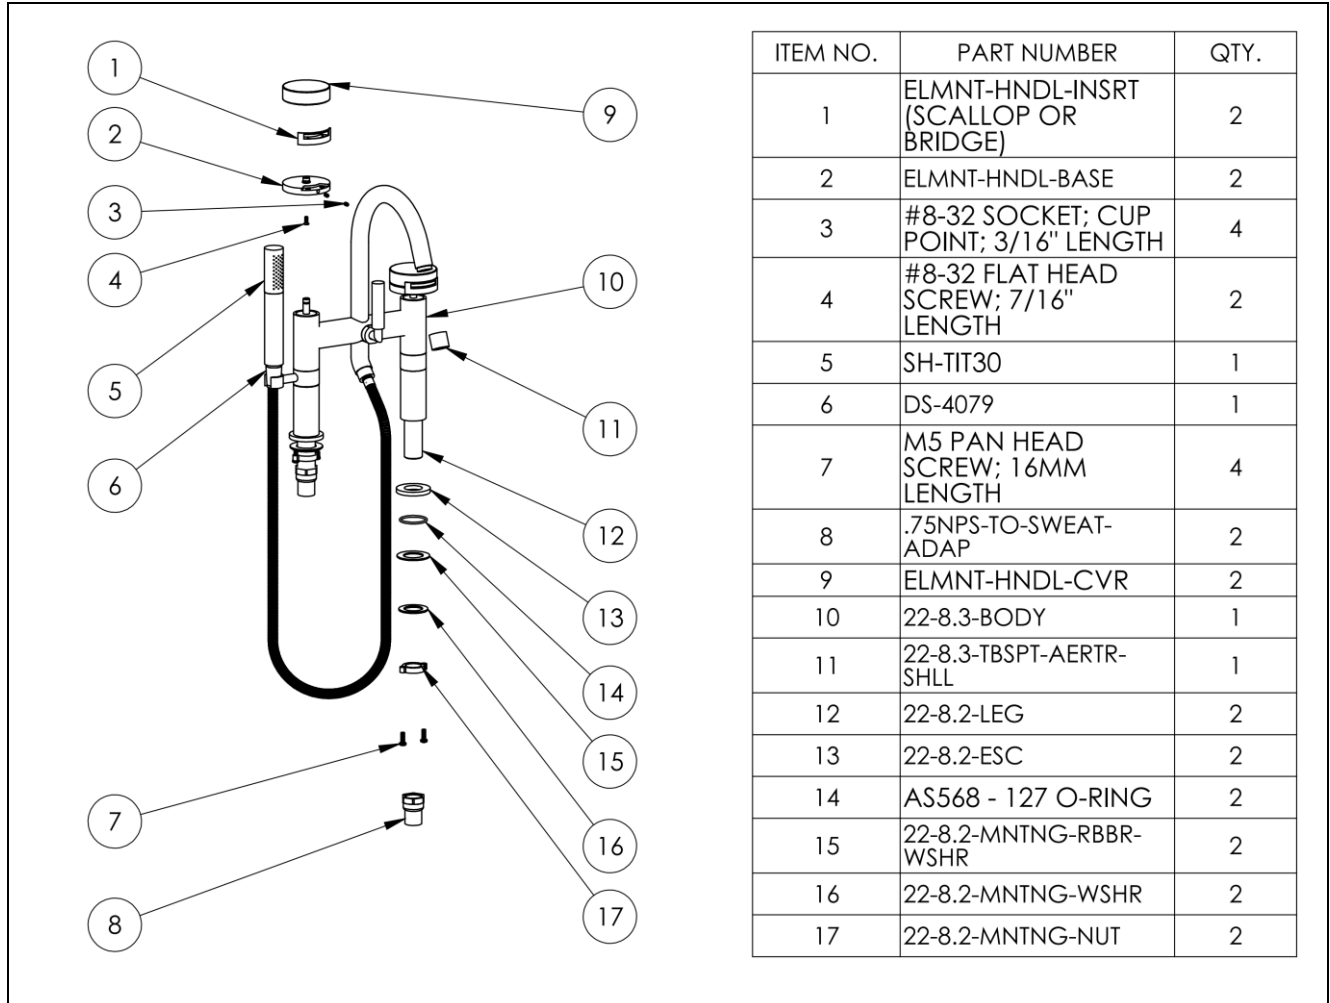

1. **Carefully remove all parts from the box.**
2. Assemble leg escutcheons (13) with the tub filler legs(12)
3. Screw hand shower hose (25) onto hand shower (24) and onto tub filler body (10)
4. Insert tub filler legs into deck
5. Insert mounting washers (15 and 16) and mounting nut with screws (17 and 7) onto the tub filler legs (12)
6. Screw ¾" NPS female to sweat adapter (8) onto tub filler legs (12)
7. Sweat lines to sweat adapter

Dimensions:

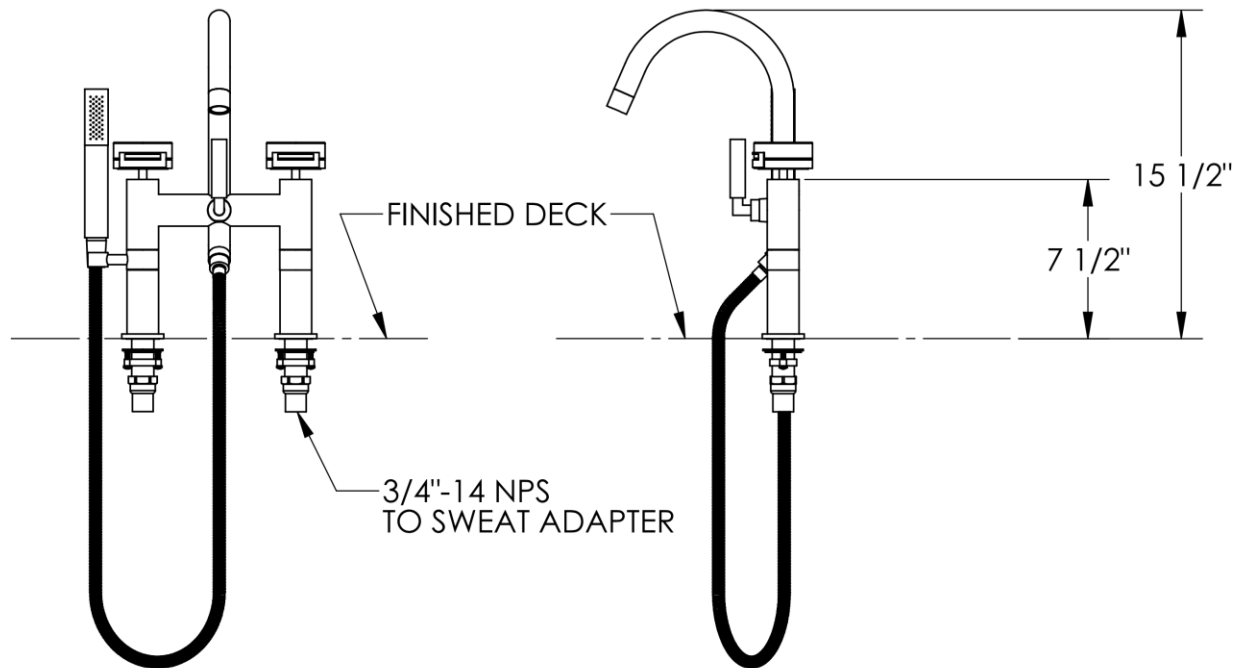

**IMPORTANT INSTALLATION INFORMATION**

- USE TEFLON TAPE OR PIPE SEALANT FOR THREADED CONNECTIONS
- DO NOT USE PLUMBER'S PUTTY ON ANY OF THE BRASS COMPONENTS  
This will cause the finish to tarnish and void the warranty. A non-corrosive Alkoxy Silicone is recommended.
- DURING SWEATING OF LINES DO NOT OVERHEAT CASTING  
Overheating may cause damage to internal mechanism
- COPPER ADAPTORS MAY BE REQUIRED TO COMPLETE YOUR INSTALLATION

**For technical support, please call 718-257-2800**