

### SS-THV2.2

### TWO-HANDLE ROUGH (INDEPENDENT HOT & COLD VOLUME CONTROLS)

### SS-THV2.2-26C

### TWO-HANDLE ROUGH (SINGLE BODY)

#### Note:

- USE TEFLON TAPE OR PIPE SEALANT FOR THREADED CONNECTIONS
- DO NOT USE PLUMBER'S PUTTY ON ANY OF THE BRASS COMPONENTS  
This will cause the finish to tarnish and void the warranty. A non-corrosive Alkoxy Silicone is recommended.
- DURING SWEATING OF LINES DO NOT OVERHEAT CASTING  
Overheating may cause damage to internal mechanism and void the manufacturer's warranty as well as increase the risk of scalding.
- COPPER ADAPTORS MAY BE REQUIRED TO COMPLETE YOUR INSTALLATION

### Diagram A

Measurements are from the tip of the nipple to the finished wall

Handle Trim #	Measurement (IN.)
A	2 1/4
AA	2 1/2
AQ	1 1/4
AX	2 1/4
AX less base ring	2 1/8
AXP	2 1/4
AZ1	1 3/4
B4/B5	2 1/8
B9M/B9P	1 3/8
BB	2 1/2
BG4/BG5/BK	2
BL1	1/4
BL2/BL3	3/4
BV01/BV02	2 1/2
BV05	1 1/4
BV09	2 1/4
BV13/BV15	1 3/4
BV81	1 1/2
CC	2 5/8
CC11	1 3/4
CC20/CC21/CC22	1 3/8
CC30/CC31	2 1/4
CC40/CC41/CC42	1 3/8
CC51	1
CC61	1 3/4
CL14/CL15	1 7/8
CL16	1 3/8


Handle Trim #	Measurement (IN.)
CRY4/CRY5/D	2 1/4
D5/D6	1 3/4
DD	2 1/2
DD2/DD3	1 1/8
ED1/ED2/ED3/ED4	1 5/8
ELEMENTS	1 3/8
EV4	1 1/8
F/G	2 1/4
H	2 1/8
H4	1 1/2
HH/I	2 1/4
IN14/IN16	2 1/4
J5/J6	1 3/4
KK	1 1/2
L4/L5/L6/L8	1
L9	1 7/8
MZ4/MZ5	2 1/8
N2/N3/N4	1 1/2
N5	1 5/8
R1	3/4
R2	1 7/8
R3	1 1/2
S	2
S1/S1A/S2/S3	1 3/8
SA1	2
SA2	2 1/4
SP4/SP5	1 3/8

Handle Trim #	Measurement (IN.)
SW	2 1/8
SWA	1 1/4
SWU/T	1 7/8
T1	1 3/4
T4	1 5/8
T6/T7/T8/T9	2 1/4
TIA/TIB	7/8
TR14/TR15	2 1/4
TR24/TR25	1 3/8
U	1 7/8
U1	2 3/8
U3/U5/U6/U7	2 1/8
U8	1 1/8
V	1 3/8
V1	5/8
V2	1 1/4
W/WW	2 1/4
WW less base ring	2 1/8
X	2
XJ/XK/XM/XN/XO/XQ	1 3/8
XX	2 1/4
Y	2
Y2	1 3/8
YY	2 1/4
Z	2
ZEN	1 1/2
ZZ	2 1/4

**NOTE: WHEN FITTING HANDLE IT MAY BE NECESSARY TO SHORTEN BROACH STEM AND/ OR THREADED NIPPLE TO MINIMIZE GAP BETWEEN HANDLE AND ESCUTCHEON**



SS-THV2.2-26C:

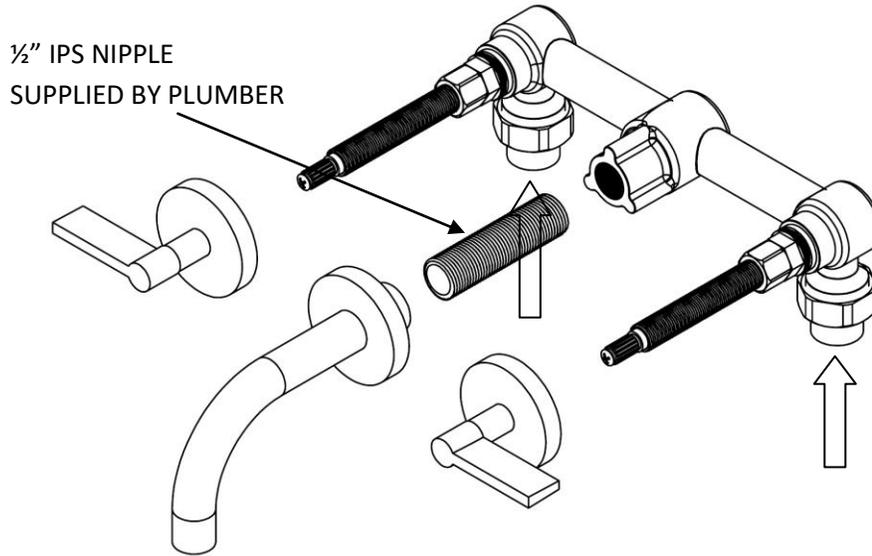

### Diagram C


FLUSH CONNECTION 1/2" NPT



GROUP A

(SERIES 24, 25, 26, 27, 28, 29, 32, 34, 96, 160, 180, 203, 312, 314)

RECESS CONNECTION 1/2" NPT  
(FEMALE THREAD)

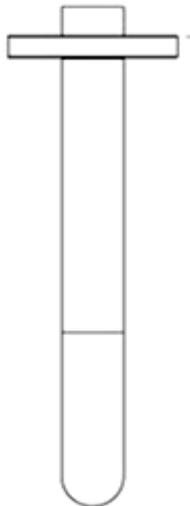

GROUP B

(SERIES 21, 22, 23, 30, 31, 33, 36, 37, 111, 115, 140, 150, 201, 205, 206, 310, 311, 313, 321)


RECESS CONNECTION 1/2" NPT  
(MALE THREAD)



GROUP C

(SERIES 35, 38, 97, 125)  
See note in Step 6 of Valve Installation.



### Diagram D



### Diagram E

SS-THV2.2:

SS-THV2.2-26C:

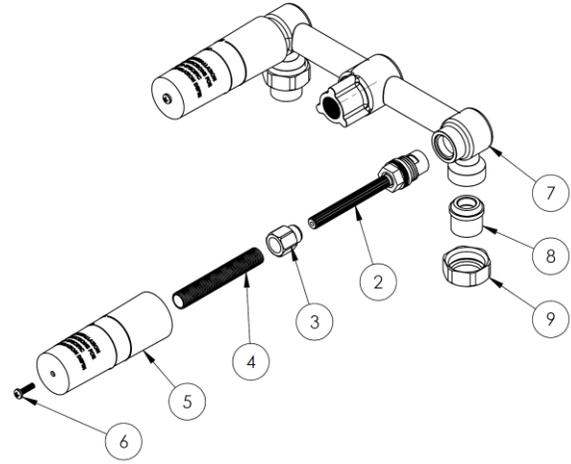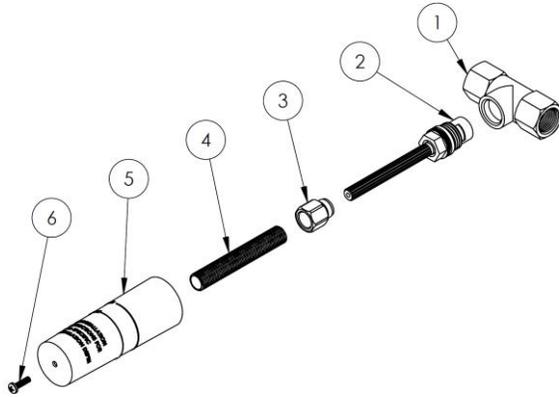


ITEM NO.	MODEL NO.	SS-THV2.2 QTY.	SS-THV2.2-26C QTY.
1	SS-TS200-BODY	2	0
2	CRT503-COLD/HOT	1 COLD/1 HOT	1 COLD/1 HOT
3	SS-TS200-PKNG-NUT	2	2
4	SS-TS200-NPPL	2	2
5	WALL-VLV-MDGRD	2	2
6	MUDGUARD SCREW	2	2
7	SS-THV2.2-26C-BODY	0	1
8	SS-THV2.2-26C-CPLNG	0	2
9	SS-THV2.2-26C-NUT	0	2

### Diagram F


SS-THV2.2:

½-14 NPT Female

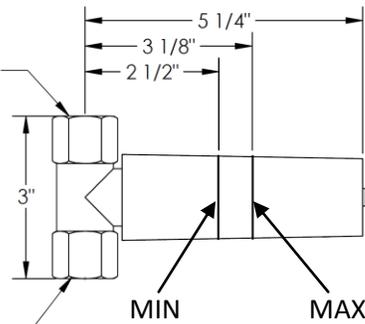

½-14 NPT Female

SS-THV2.2-26C:

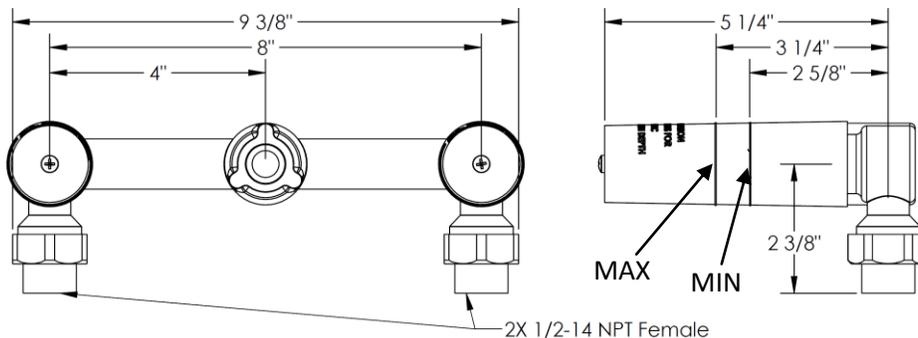

Rev. 10/2017