

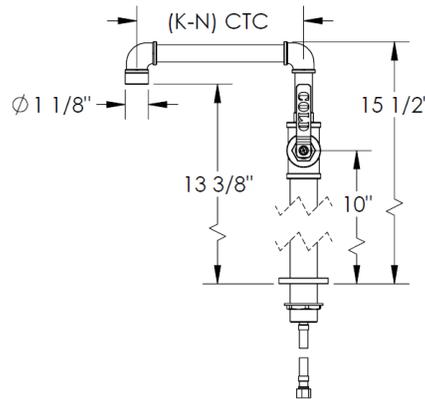


FEATURES

- ¼ turn washerless ceramic disc valve cartridges
- Flexible hose connections
- Flow rate 1.5 gpm (5.7 lpm) maximum flow rate
- Solid brass construction
- Warranty:
 - Limited lifetime warranty (residential use)
 - One year (commercial use)
- Shipping weight (lbs.) 10
- Shipping dimensions (in.): 29x12x4

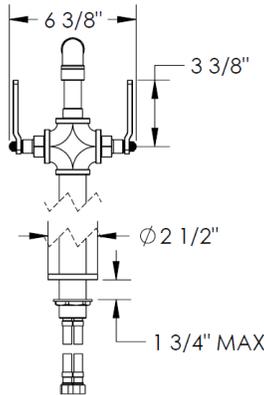

K=5.5"
L=6.5"
M=7.5"
N=8.5"

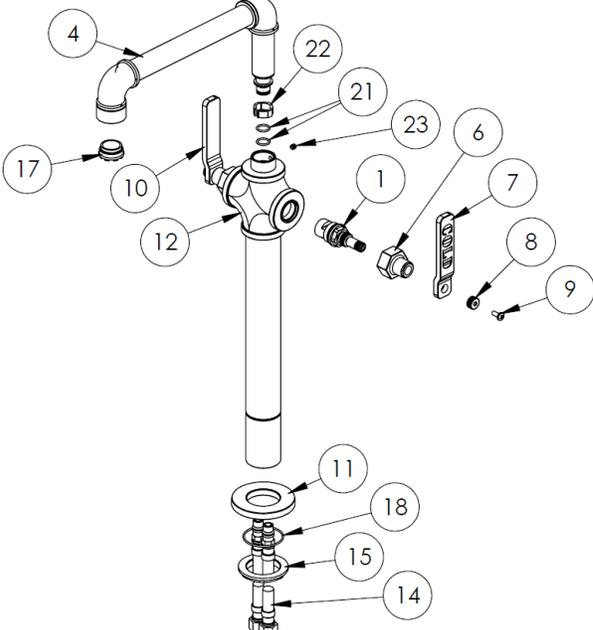

ITEM NO.	PART NUMBER	QTY.
1	SS-502-CRTG	2
4	38-7.2-SPT-ASSY	1
6	38-2.3-ESC	2
7	EV4-LVR-C2	1
8	EV4-POST-CAP	2
9	CR-PHMS 0.164-32x0.375x0.375-N	2
10	EV4-LVR-H2	1
11	38-1-SPT-BASE	1
12	38-7.2-CRSS-BODY-ASSY	1
14	SPPLY-HOSE-3-8COMP	2
15	SS-DMV1.3-NUT	1
17	NEOPERL CACHE AERATOR	1
18	AS568 - 029	1
21	AS568 - 013	2
22	SWVL-PLSTC-BSHNG	1
23	SSCUPSKT 0.19-32x0.1875-HX-S	1

IMPORTANT INSTALLATION INFORMATION

- USE TEFLON TAPE OR PIPE SEALANT FOR THREADED CONNECTIONS
- DO NOT USE PLUMBER'S PUTTY ON ANY OF THE BRASS COMPONENTS
This will cause the finish to tarnish and void the warranty. A non-corrosive Alkoxy Silicone is recommended.
- DURING SWEATING OF LINES DO NOT OVERHEAT CASTING
Overheating may cause damage to internal mechanism
- COPPER ADAPTORS MAY BE REQUIRED TO COMPLETE YOUR INSTALLATION

For technical support, please call 718-257-2800

