


WATERMYRK DESIGNS 9/3/2019




Wall Mounted 3 Hole Lavatory Set

For use with SS-THV2.2 concealed rough


Flow Rate: 1.2 GPM



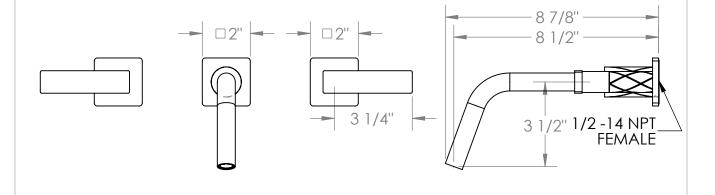

Meets the applicable requirements of ASME A112.18.1-2005/CSA B125.1-05, entitled "Plumbing Supply Fittings"


WATERMYRK DESIGNS 9/3/2019



Wall Mounted 3 Hole Lavatory Set For use with SS-THV2.2 concealed rough

Flow Rate: 1.2 GPM



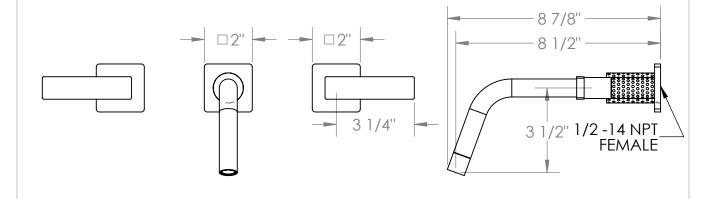

Meets the applicable requirements of ASME A112.18.1-2005/CSA B125.1-05, entitled "Plumbing Supply Fittings"

WATERMYRK DESIGNS 9/3/2019