



Installation manual for

1107F18C, 1107F18BK, 1107F18BR

Dimensions : D18" H11" L5

Collection : Savannah

Bulb Type : E11 bulb not included

Lamp Frame Weight: 4.27 LBS

Total Weight : 29.5LBS



Thank you for choosing our product(s).


Our Company is actively involved in every step of the production.

Our product(s) are designed to be utilized for every application that graces your home or business.

We pride ourselves in providing the most prompt and courtesy service to all of the valued customers.

Please find the enclosed detailed instruction and read carefully for proper installation.

If you have any questions, please contact the retailer Where the purchased was made.



SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF. BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.


CAUTION

- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit : 110 - 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.

Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions, where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued customers.

Frame Assembly Diagram

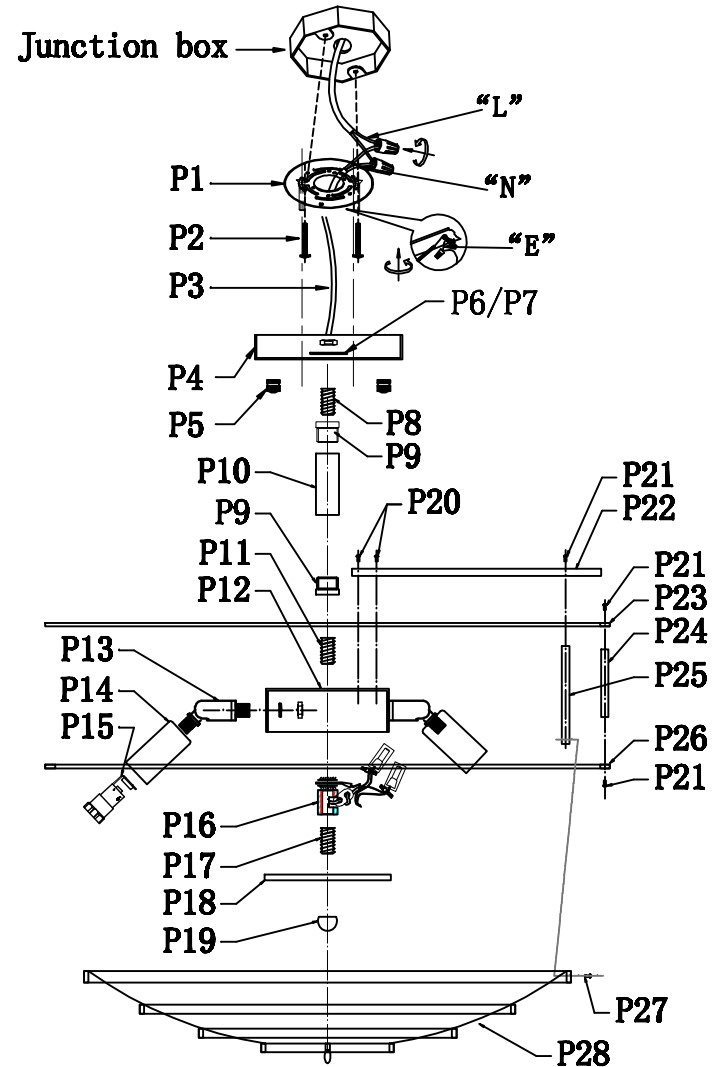
















1107F18 D18" H11" L5















Step 1

Please use the parts list to ensure you are not missing any parts.

PARTS LIST

| Part # | Picture | Description | Qty | Check list |
|--------|---|-------------------------------|-----|------------|
| P1 |  | Crossbar 4" (Canopy part) | 1 | |
| P2 |  | 5/32-32 Screw | 2 | |
| P3 |  | Power Cord 20" SPT-1 Black | 1 | |
| P4 |  | D4.75" Canopy plat | 1 | |
| P5 |  | NUT | 3 | |
| P6 |  | Set nut | 2 | |
| P7 |  | metal washer | 1 | |
| P8 |  | thread pipe | 1 | |
| P9 |  | Metal nut | 2 | |
| P10 |  | Metal tube | 1 | |
| P11 |  | thread pipe | 1 | |
| P12 |  | Metal Wire Box | 1 | |
| P13 |  | Shake rod | 5 | |
| P14 |  | metal lamp cap | 5 | |
| P15 |  | E12 Socket | 5 | |

1107F18 D18" H11" L5

| Part # | Picture | Description | Qty | Check list |
|--------|---|----------------------|-----|------------|
| P16 |  | Hickey | 1 | |
| P17 |  | thread pipe | 1 | |
| P18 |  | Metal cover | 1 | |
| P19 |  | Cap nut | 1 | |
| P20 |  | Ground Screw | 8 | |
| P21 |  | Ground Screw | 12 | |
| P22 |  | Rectangle metal tube | 4 | |
| P23 |  | D16"Metal Ring | 1 | |
| P24 |  | Square metal tube | 4 | |
| P25 |  | Square metal tube | 4 | |
| P26 |  | D16"Metal Ring | 1 | |
| P27 |  | Ground Screw | 4 | |
| P28 |  | D13"Metal Frame | 1 | |
| A |  | 701-40# | 113 | |
| | | | | |
| | | | | |
| | | | | |


1107F18 D18" H11" L5

Step 2

Canopy Installation Instruction

IMPORTANT: Test sockets with bulb before dressing the fixture.

1. Attach the crossbar to the electrical box.
2. Pull wires up through the nipple.
3. Attach the fixture to the ceiling.
4. Make the electrical connections as detailed in the drawing above.

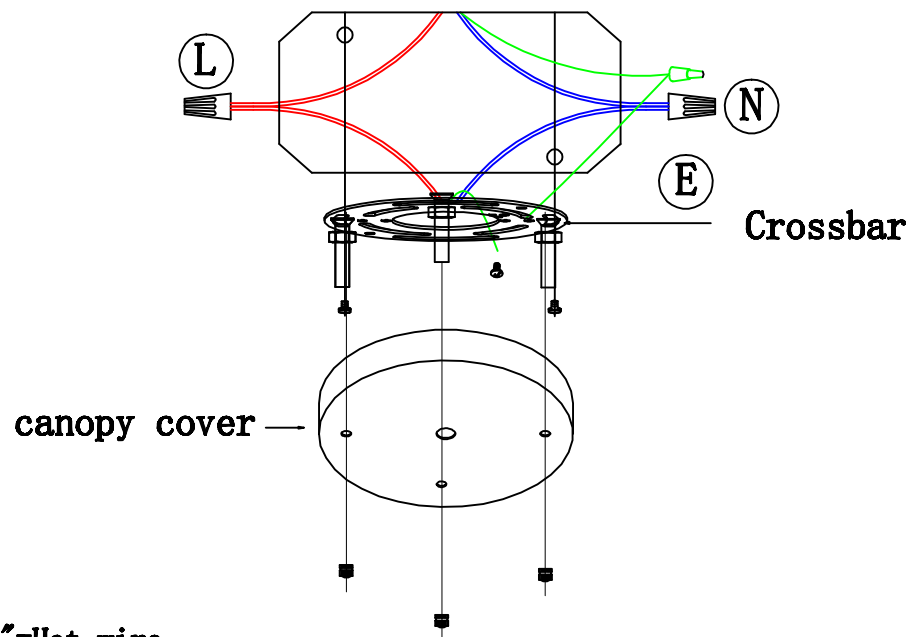

"L"=Hot wire
"N"=Neutral wire
"E"=GND

05

1107F18 D18" H11" L5

Step 3

Frame Assembly Instructions

1. Connect the square pipe (6) to the metal frame (8) and lamp body assembly (5) by screws (4).
2. Connect the Canopy (1) and metal tube (2) to the lamp body assembly (5).
3. Attach the fixture to the ceiling by nut (3).
4. Install E12 light source, no include bulb.

The end!


Step 4



When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.

Crystal Dressing Diagram

1. Hanging crystal (A) on the fixture (Canopy)

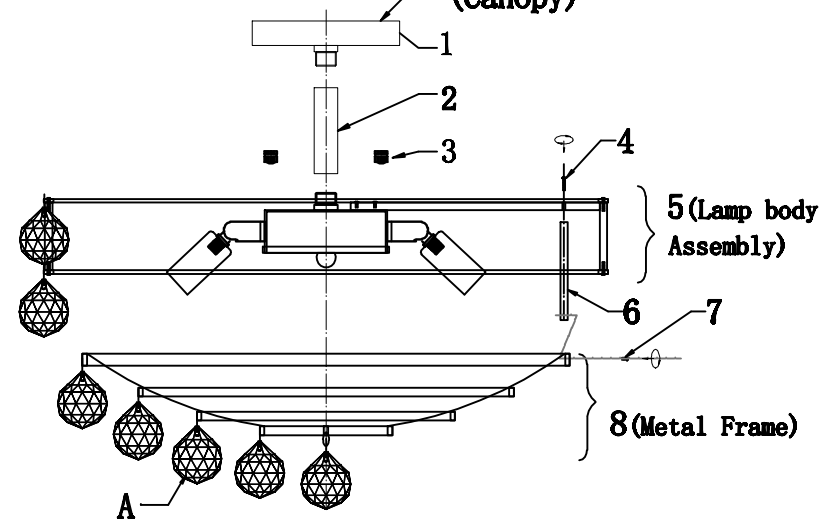

06

Congratulations !

You are now done installing your Elegant Lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

Thank you.

Cleaning and Maintenance of Chandelier Frame

The finish on our chandelier frames and fixture frames is protected by a durable coating of lacquer. To clean, use a clean soft, dry cloth. Do not use any metal polishes, cleaners, abrasives or any substance which could remove the protective finish. Failure to follow these instructions automatically voids the guarantee.

Cleaning and Maintenance of Crystals

Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

To Order Crystal Replacement Parts

Should you require replacement crystals or pins (the metal connectors attaching the crystals), contact the store where the product was purchased or contact us . For ease of ordering, you may use the original crystal trimming instructions provided with this product and circle the items you wish to order, indicating the quantity by writing the number needed adjacent to the circle . You will be contacted with prices prior to shipment. All orders must be pre-paid.

1107F18 D18" H11" L5

Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of one (1) year from the date of purchase. Our company will, at its option, repair or replace any frame that has a defect in the materials or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department.

A written return authorization form will be sent to you with specific instructions.

1107F18 D18" H11" L5

Returns and Conditions of Warranty

Returns must be pre-authorized by contacting our customer service department .Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reserve the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warrantee, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.