




Installation manual for: 5301\(\pi 22C \)


Dimensions: L22.04"W5.35"H2.67"L3

Collection: Pollux

Bulb Type :AC LED 15W 3000K

Lamp Weight (lbs):6.6



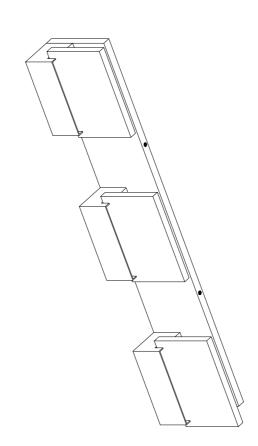

Thank you for choosing our exquisite chandelier. We are providing the finest quality crystal chandelier for our customers. Our master designers and craftsmen intend to give a professional insight on lighting design and product quality. Prompt and efficient services are our priority. We enclosed detail instructions on how to install your light fixture properly. Please read all instructions carefully and thoroughthoroughly. If you have any questions, our professional customer service team is committed to assisting you, please call our toll free HOTLINE AT:

1-888-388-3390



Intertek

SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE
WORKING ON IS SHUT OFF, BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT

BREAKER.

AUT ION

- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit: 110 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.

 Naver install fixture on damn ceiling the room should
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a licensed electrician and in accordance with the National


Electrical Code and the appropriate local electrical codes.

Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions, please call our Customer Service department at 1-888-388-3390. Please have model number (at the front page), where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued customers.

5301W22 L22.04"W5.35"H2.67"L3

Frame Parts List

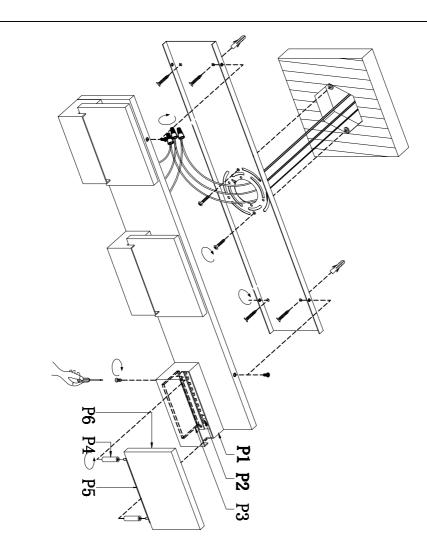





5301W22 L22.04~W5.35~H2.67~L3

Step 1

Please use the parts list to ensure you are not missing any parts

5301W22

PARTS LIST

TAX V	
7	


٥	77.IITOOC		Ç		
part	picture	Description	Part number		Qty Check list
ZA		4"Junction box (not included)		1	
ZB		P4 traction relief		သ	
ZC	ýmo	Screw DO. 2"		4	
ZD		Mounting bracket: L20.86"*\ 4.13"\ 40.47"		1	
ZE	* munuut>	M5*35 Screw		4	
ZF	1	5/32-32 Scre₩		2	
ZG		Iron box: L21. 26"*\4. 33"*\0. 51'		-	
ZH	P	M4 Nut		4	
P1		Iron pipe: L4. 92"*\2. 16"*\1. 96"		ယ	
P2		AC LED L3. 93"*WO. 78"		ယ	
P3	A Company of the Comp	Glass:L4. 72″*\1. 96″		သ	

5301W22 L22.04"W5.35"H2.67"L3

 '	•	•	•	•	•	•				
							P6	P5	P4	part
							<u> </u>	51	4	7
									 ®	picture
							Crystal: L5. 7"*#3. 93"**0. 47"	Metal plate: L4.72**W0.47*	Iron bars: 0.31"*W1.18"	Description
							CY5301L57CL			Part number
							သ	ယ	3	Qty
										Qty Check
										list

Step 2

Canopy installation instructions

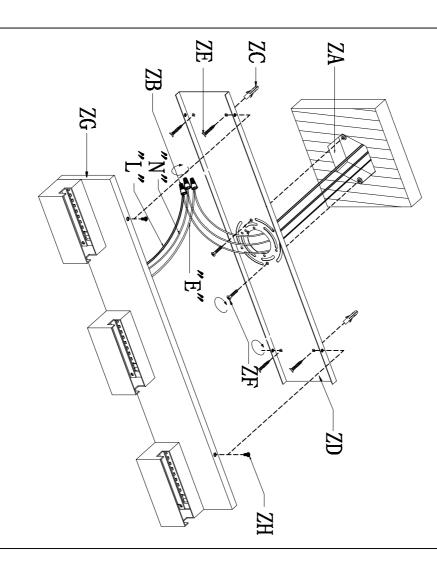

"L" = Hot wire
"N" = Neutral wire
"E" = Ground wire

Important: This product must be installed in accordance with the local installation codes by a person familiar with construction and operation of this product and the hazards involved.


- Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- Secure mounting bracket to the junction box.
- Insert screws in side of top unit the mounting bracket.

'n

(9)

5301W22 L22.04"W5.35"H2.67"L3

Frame Assembly Diagram

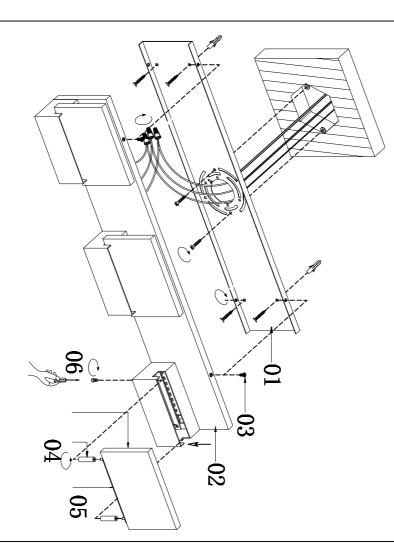

5301W22 L22.04"W5.35"H2.67"L3 Step 3

Frame Assembly Instructions

Installation:
Please read all instructions carefully.

Please proceed in a numerical order. Please note that each part has been assigned a number. Before you proceed to install, make sure that the power supply is turned off and remains off until installation is complete.

- 1. Fix the Mounting bracket (01) to the wall
- 2. Fix the lamp body (02) to the mounting bracket (01) with screw (03).
- 3. Fix the Iron bars (04) lock in the Crystal (05).
- 4. Fix the Crystal (05) lock in lamp body (02) with screw (06).

The end!

Congratulations!

You are now done installing your Elegant Lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

If you require any additional assistance, please contact us at 1-888-388-3390.

Thank you.

Cleaning and Maintenance of Chandelier Frame
The finish on our chandelier frames and fixture frames is
protected by a durable coating of lacquer. To clean, use
a clean, soft, dry cloth. Do not use any metal polishes,
cleaners, abrasives or any substance which could remove
the protective finish. Failure to follow these
instructions automatically voids the guarantee.

Cleaning and Maintenance of Crystals Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

To Order Crystal Replacement Parts
Should you require replacement crystals or pins (the metal connectors attaching the crystals), contact the store where the product was purchased or contact us at the address shown on the reverse side. For ease of ordering, you may use the original crystal trimming instructions provided with this product and circle the items you wish to order, indicating the quantity by writing the number needed adjacent to the circle and faxing it to our customer service department at215-423-8882. You will be contacted with prices prior to shipment. All orders must be pre-paid.

Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of two(2) years from the date of purchase. Our company will at its option, repair or replace any frame that has a defect in the material or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department at the address and phone number shown below. A written return authorization form will be sent to you with specific instructions.

CUSTOMER SERVICE DEPARTMENT

500-550 E. Erie Avenue

Philadelphia, PA 19134

Tel:215-423-8880 Fax:215-423-8882

5301W22 L22. 04"W5. 35"H2. 67"L3

Returns and Conditions of Warranty

with the sale of our products. or firm to assume for us, any liability in connection all other guaranteed or warrantee, whether written or procedures. This guarantee is issued in lieu of any and follow the recommended maintenance or installation others, nor for damages resulting from a failure to incurred during improper installation or wiring by subject to misuse, negligence, accident or inappropriate crystal parts or metal frame part that have been any breakage or damages incurred during transit, nor for pre-authorized facility. We will not beresponsible for any product that has been changed, altered or otherwise shipping charges pre-paid. We reserve the right to reverse side. Returns will only be accepted with a customer service department at the address on the Further, we neither authorize nor permit any other person implied and any and all other obligations or liabilities handling. Also, we will not be held responsible for damage been repaired or altered by anyone other than a modified, nor shall it apply to any product that has nature of any defect. This guarantee shall not apply to inspect all returned merchandise to fully determine the written return merchandise authorization and return Returns must be pre-authorized by contacting our