

LIVING DISTRICT

Collection:Mimi



Installation manual for:

LD2450 W5.9"H5.9"E8.3"L1







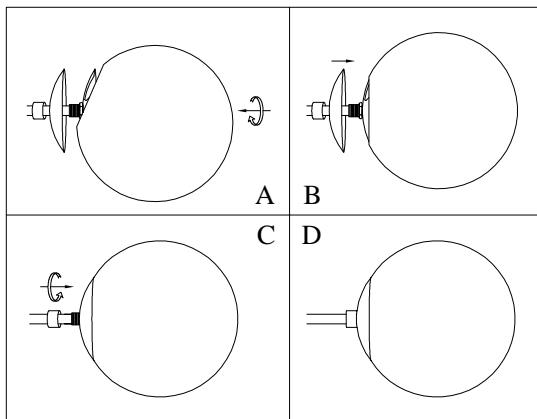
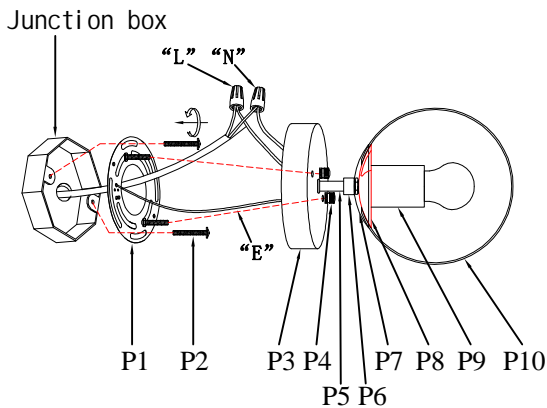


Installation instructions:

1. Secure Mounting bracket(P1) to the junction box.
 2. Insert screws(P2) in side of top unit the mounting bracket.
 3. Black wire from ceiling(junction box) attaches to "L" wire from the fixture.
 4. White wire from ceiling(junction box) attaches to "N" wire from the fixture.
 5. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
 6. Fix the Back plate(P3) to the Mounting bracket(P1) and tighten by the Nuts(P4).
 7. Install the bulbs(bulbs not included) into the lampholder(P9).
 8. Clip the Glass shade(P10) into the gap of the Gap Dish(P8).
 9. Rotate the Glass shade(P10) and install the Gap Dish(P8) into the Glass shade.
 10. Fix the Metal Dish(P7) and tighten the Nut(P6).
- The end!

PARTS LIST



"L" = Hot wire
 "N" = Neutral wire
 "E" = Ground wire

part	picture	Description	Qty	Check list
P1		ø4.5" Mounting bracket	1	
P2		5/32-32 Screw	2	
P3		ø4.7" Metal Back plate	1	
P4		M5 Nuts	2	
P5		L2.2" Metal Rod	1	
P6		M10 Nut	1	
P7		D3.2" Metal Dish	1	
P8		D3.2" Gap Dish	1	
P9		E26 Metal Cup	1	
P10		D5.9" Glass shade	1	