## LIVING

Collection: Cassie


Installation manual for:

LD7029W41BK/BR/SN W41.3" E5.2" H7.7" L5

## **Installation instructions:**

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert the mounting bracket screw(P2) into the mounting bracket (P1)
- 6.Use the screw(P5) to lock the lamp body to the mounting bracket (P1) on the ceiling.
- 7.Locking the glass shade(P3) on the socket(P4) by tool(P11)
- 8.Install E12 light source.(Bulbs not supplied)

The end!

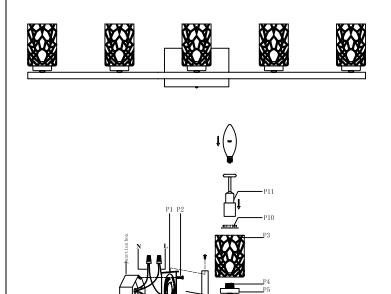

| Part | Picture         | Description                              | Qty | Check list |
|------|-----------------|--|-----|------------|
| P1   | 0               | mounting bracket<br>L4.72″*W4.53″*H0.59″ | 1   |            |
| P2   | <u></u>         | Mounting bracket screw                   | 2   |            |
| Р3   |                 | Glass shade<br>Φ3.5"*H5.9"               | 5   |            |
| P4   | Ī               | E12 holder                               | 5   |            |
| Р5   |                 | Сир<br>Ф 2. 4"*H0. 59"                   | 5   |            |
| Р6   |                 | Lamp arm<br>L31.9"*H0.79"*W0.39"         | 1   |            |
| P7   |                 | head tube<br>(Φ0.4"*L2.8")               | 2   |            |
| P8   |                 | Backplate<br>L7.9"*W4.7"*H0.8"           | 1   |            |
| Р9   |                 | Screw                                    | 4   |            |
| P10  | <b>,,,,,,,,</b> | E12 socket ring                          | 5   |            |
| P11  |                 | E12 tool                                 | 1   |            |
| P12  |                 | UL18#Ground wire, L9.84"                 | 1   |            |
| P13  | ~               | UL18#, L6″                               | 1   |            |

<sup>&</sup>quot;L" = Hot wire

<sup>&</sup>quot;N" = Neutral wire

<sup>&</sup>quot;E" = Ground wire