

LIVING DISTRICT

Collection: Elise


Installation manual for:

LD711D14 $\Phi 14'' \times H15'' L4$

Installation instructions:

1. Black wire from ceiling(junction box) attaches to "L" wire from the fixture.
2. White wire from ceiling(junction box) attaches to "N" wire from the fixture.
3. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
4. Secure mounting bracket to the junction box.
5. Connect chain (P6) with toothed ring (P7) and canopy (P4).
6. Install the lamp body to the mounting bracket by screws(3).
7. Hang crystal A(P14) onto the dish(P13), crystal B(P15) onto the lamp arm(P16), crystal C(P17) onto the nut(P10).
8. Install E12 light source.(Bulbs not supplied)

The end!

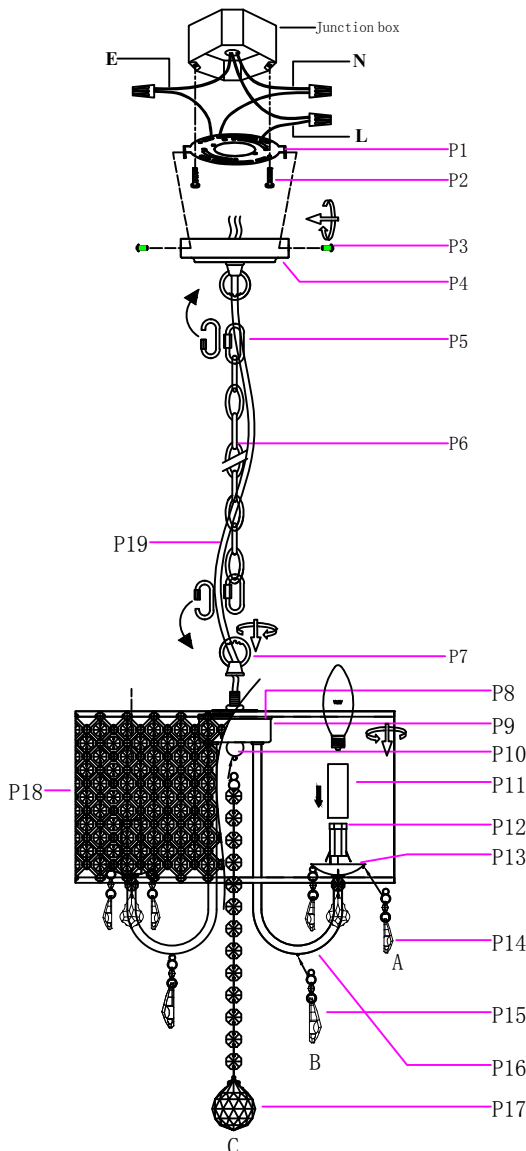

Part	Picture	Description	Qty	Check list
P1		Mounting bracket $\Phi 4.53'' \times H0.59''$	1	
P2		Mounting bracket screw	2	
P3		Screw	2	
P4		Canopy ($\Phi 4.72'' \times H1.02''$)	1	
P5		Activity buckle (L1.5''*W0.78''* \varnothing 0.15'')	2	
P6		Hanging chain (CHAIN04P) L1.5''*W0.78''* Φ 0.15''(Total lengthh 59'')	1	
P7		Toothed ring (W1.3''*H1.6'')	2	
P8		Wire Box Cover (3.23''*H0.2'')	1	
P9		Wire Box($\Phi 3.15'' \times H1.38''$)	1	
P10		Nut ($\Phi 0.63'' \times H0.51''$)	1	
P11		Socket Tube($\Phi 0.87'' \times H2.36''$)	4	
P12		E12 Socket	4	
P13		Dish ($\Phi 2.36'' \times H0.47''$)	4	
P14		RC911-38*1-CL-C+ RC1050-14*1-CL-C (A)	16	
P15		RC911-50*1-CL-C+ RC1050-14*1-CL-C (B)	4	
P16		Lamp arm (L3.91''*H9.75'')	4	
P17		RC701-40*1-CL-C+ RC1050-14*13-CL-C (C)	1	
P18		Lamp frame ($\Phi 14'' \times H7.5''$)	1	
P19		18# SPT-1 L78.7''	1	

"L" = Hot wire

"N" = Neutral wire

"E" = Ground wire