

LIVING DISTRICT

Collection: Elise


Installation manual for:

LD711D17 $\Phi 17'' * H15'' * L4$

Installation instructions:

1. Black wire from ceiling(junction box) attaches to "L" wire from the fixture.
2. White wire from ceiling(junction box) attaches to "N" wire from the fixture.
3. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
4. Secure mounting bracket to the junction box.
5. Connect chain (P6) with toothed ring (P7) and canopy (P4).
6. Install the lamp body to the mounting bracket by screws(3).
7. Hang crystal A(P14) onto the dish(P13), crystal B(P15) onto the lamp arm(P16), crystal C(P17) onto the nut(P10).
8. Install E12 light source.(Bulbs not supplied)

The end!

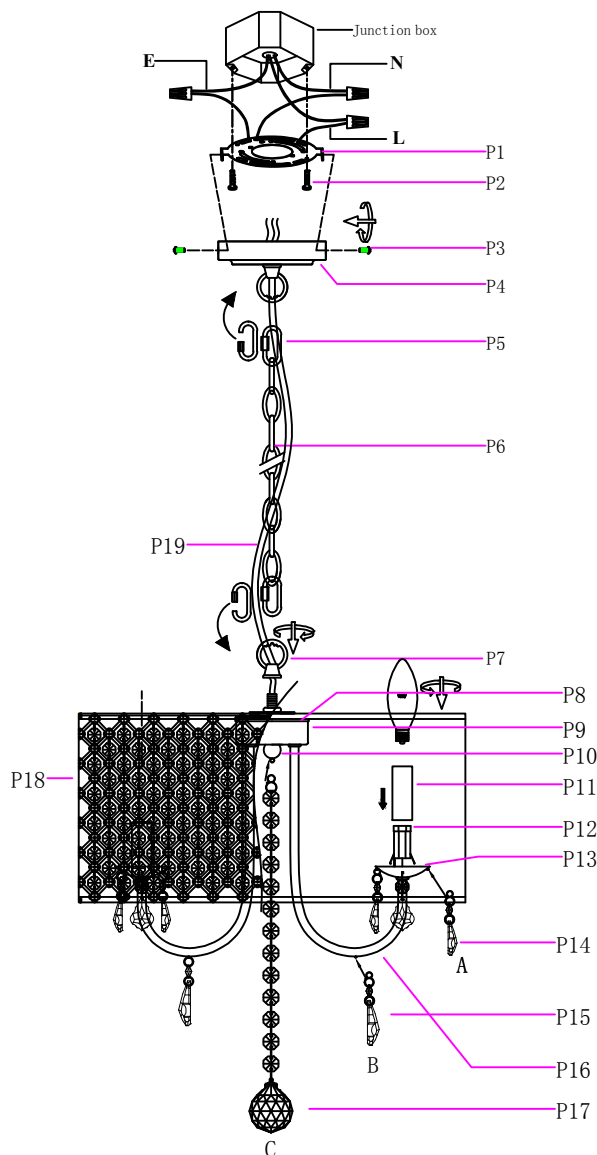

Part	Picture	Description	Qty	Check list
P1		Mounting bracket $\Phi 4.53'' * H0.59''$	1	
P2		Mounting bracket screw	2	
P3		Screw	2	
P4		Canopy ($\Phi 4.72'' * H1.02''$)	1	
P5		Activity buckle (L1.5''*W0.78''* \varnothing 0.15'')	2	
P6		Hanging chain(CHAIN04P) L1.5''*W0.78''* \varnothing 0.15''(Total length 59'')	1	
P7		Toothed ring (W1.3''*H1.6'')	2	
P8		Wire Box Cover (3.23''*H0.2'')	1	
P9		Wire Box($\Phi 3.15'' * H1.38''$)	1	
P10		Nut ($\Phi 0.63'' * H0.51''$)	1	
P11		Socket Tube($\Phi 0.87'' * H2.36''$)	4	
P12		E12 Socket	4	
P13		Dish ($\Phi 2.36'' * H0.47''$)	4	
P14		RC911-38*1-CL-C+ RC1050-14*1-CL-C (A)	16	
P15		RC911-50*1-CL-C+ RC1050-14*1-CL-C (B)	4	
P16		Lamp arm (L5''*H9.75'')	4	
P17		RC701-40*1-CL-C+ RC1050-14*13-CL-C (C)	1	
P18		Lamp frame ($\Phi 17'' * H7.5''$)	1	
P19		18# SPT-1 L78.7''	1	

"L" = Hot wire

"N" = Neutral wire

"E" = Ground wire