# Artifacts™



66-1/8" x 32-1/2" freestanding bath w/ Biscuit exterior **K-21000-B** 

## **Features**

- Freestanding design creates a striking focal point in your bathing area.
- Integral lumbar support on both ends.
- Safeguard® slip-resistant surface on bath floor.
- Coordinates with Artifacts faucets and accessories.

## Material

- KOHLER® enameled cast iron.
- Painted exterior in Biscuit.

## Installation

Freestanding.

# **Required Products/Accessories**

K-204 ball-and-claw feet K-7159 1-1/2" pop-up bath drain for freestanding baths or

K-20027 bath base for freestanding bath K-7159 1-1/2" pop-up bath drain for freestanding baths

# **Recommended Products/Accessories**

K-23726 Drain treatment K-23725 Cast iron cleaner



# Codes/Standards

ASME A112.19.1/CSA B45.2

# KOHLER® Enameled Cast Iron Bath and Shower Base Lifetime Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes

Color tiles intended for reference only.

**Color Code Description** 


96 Biscuit





# Artifacts™




# 66-1/8" x 32-1/2" freestanding bath w/ Biscuit exterior K-21000-B

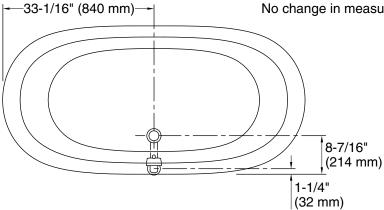

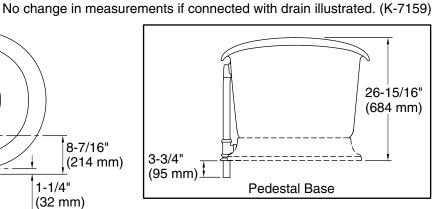

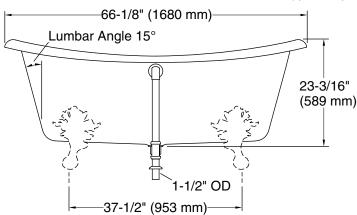



# **Technical Information**

All product dimensions are nominal.

Installation: Freestanding Drain location: Center rear

Basin area, bottom: 48-15/16" x 24-3/4" (1243 mm x

629 mm)

Basin area, top: 58-11/16" x 27-13/16" (1491 mm x

706 mm)

Weight: 389.5 lbs (176.7 kg)

Minimum floor load: 90 lbs/ft² (439.4 kg/m²)

Water depth: 14-3/8" (366 mm)

Water capacity: 90 gal (340.7 L)

Template: Footprint, 1344921-7, required, not

included

## **Notes**

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

