

Sofia Series Vanities

Specification & Installation Guide



Specification & Installation Guide

Features

- Furniture grade water proof polyvinyl
 Chloride board, protected with several
 Coats of polyurethane.
- Matching finish inside with drawers front.
- Two fully adjustable drawer with
 Full extension soft-close hardware.

Package Dimension

24" 26-3/8" X 20-15/32" X 21-17/64"

30" 32-43/64" X 20-15/32" X 21-17/64"

36" 38-37/64" X 20-15/32" X 21-17/64"

Colors / Finishes

Matte White - 01

Matte Grey - 15

Handle-Matte Grey

Gross Weight

24" 41.89LBS


30" 48.5LBS


36" 52.91LBS


Sink Top Options


Vanities			Ceramic basin			Artificial stone basin		
24"	V8020	24 01/15		C04 2418		A10 2418 25		
30"	V8020	30 01/15		C04 3018		A10 3018 25		
36"	V8020	36 01/15		C04 3618		A10 3618 25		
48"	V8020	48 01/15 (two 24")		C04 4818D		A10 4818 25D		


SOFIA

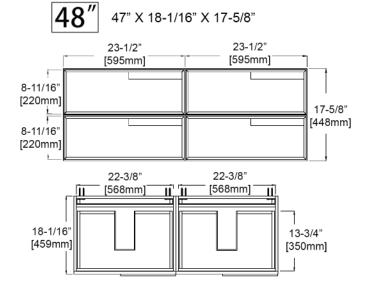











24" 23-1/2" × 18-1/16" × 17-5/8"



Side View




Specifcation & Installation Guide

		Hardware		Tools (not includes)	
No.		Draw	Qty		
А	Anchors	O THIND	2pcs		
В	Lag Bolt	⊛⊅	10pcs		
С	Leveling Bracket		2pcs		

Wall Preparation

luxury made simple


The typical dimensions shown will result in vanity cabinet height of 32-3/4" (831mm). Depending on the sinks selected, the total height will vary from 33-1/2" (850mm) 35-1/4" (895mm). If an alternate height is desired, adjust the rough-in and backing material heights using the dimensions provided.

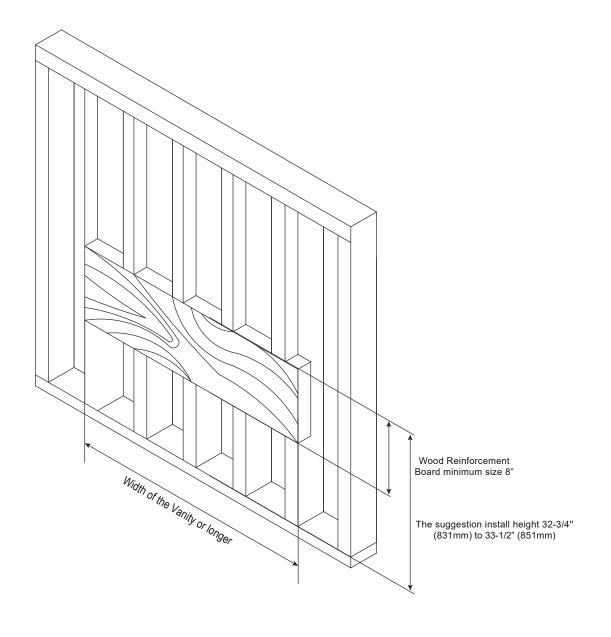

SOFIA

STEP 1. Cabinet positioning and installation


- The suggestion height of vanity installation is 32-3/4"
 (831mm) not including the basin.
- The height of Leveling Bracket Installation is 26-1/2" (671mm).

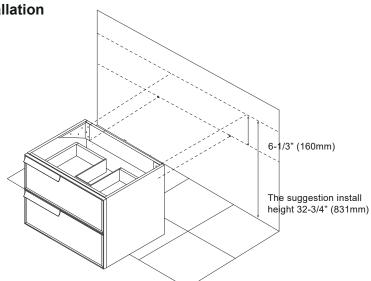

STEP 2.

Leveling bracket installation

 Install leveling bracket after determining the height of vanity.



STEP 3.

Hang the cabinet on the leveling bracket and adjust it horizontally

Place vanity on leveling bracket, Leveling brackets are only to level the vanity. They are not designed for permanent support.

Vanity needs to be secured into the wood backing material.


Specifcation & Installation Guide

STEP 4.

Fixed Cabinet


Install Lag Bolt after determined the height, left

& right position then fix the Vanity.

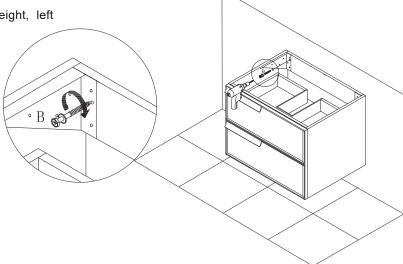


STEP 5.

Install sink top with Silicone



STEP 6.

Finish





Blossom Kitchen & Bath Supply Corporation (718)-366-0088 | sales@BlossomUS.com | www.BlossomUS.com

For clarification, please contact us at (718)-366-0088 or sales@BlossomUS.com All dimensions are approximate and subject to standard tolerance. Specifications subject to change without prior notice.