





Submitted Model No.:

Specific Features:

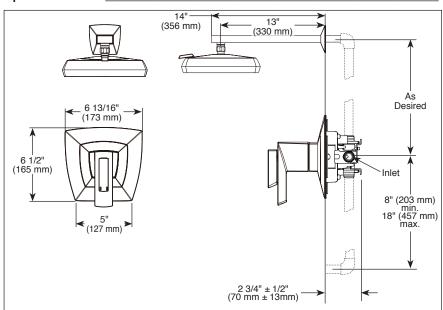







(262 mm)

RP90567▲ (Non-Diverter)

Sold separately

▲ Designate proper finish suffix

Brizo reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BRIZO

SHOWER FAUCET TRIM

- Vettis[™] Collection
- Valve Only (T60088)
- Shower Only (T60288)

FEATURES:

- TempAssure® thermostatic valve cartridge
- H₂Okinetic® Multi-function showerhead

STANDARD SPECIFICATIONS:

- Maximum 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Maximum system flow rate 9.4 gpm @ 60 psi with R60000-UNBXHF
- Thermostatic wax element maintains the outlet temperature to +3.6 F
- Must also order MultiChoice[®] Universal rough valve body (R60000 Series)
- Back-to-back installation capability
- Lever volume control handle; temperature adjustment lever
- Red/Blue temperature indication on handle
- Field adjustable to limit handle rotation into hot water zone
- All parts replaceable from the front of the valve
- Adjusts for up to 1" wall thickness. Optional extension kit (RP91022▲) extends rough installation up to 1 3/4"
- Solid brass showerarm

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



2 13/16

(72 mm)

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1 Indicates compliance to ICC/ANSI A117.1 Valve control only
- EPA WaterSense®

Brizo Kitchen & Bath Company

55 E. 111th Street, Indianapolis, Indiana 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2018 Brizo Kitchen & Bath Company