


Submitted Model No.: \_\_\_\_\_  
 Specific Features: \_\_\_\_\_

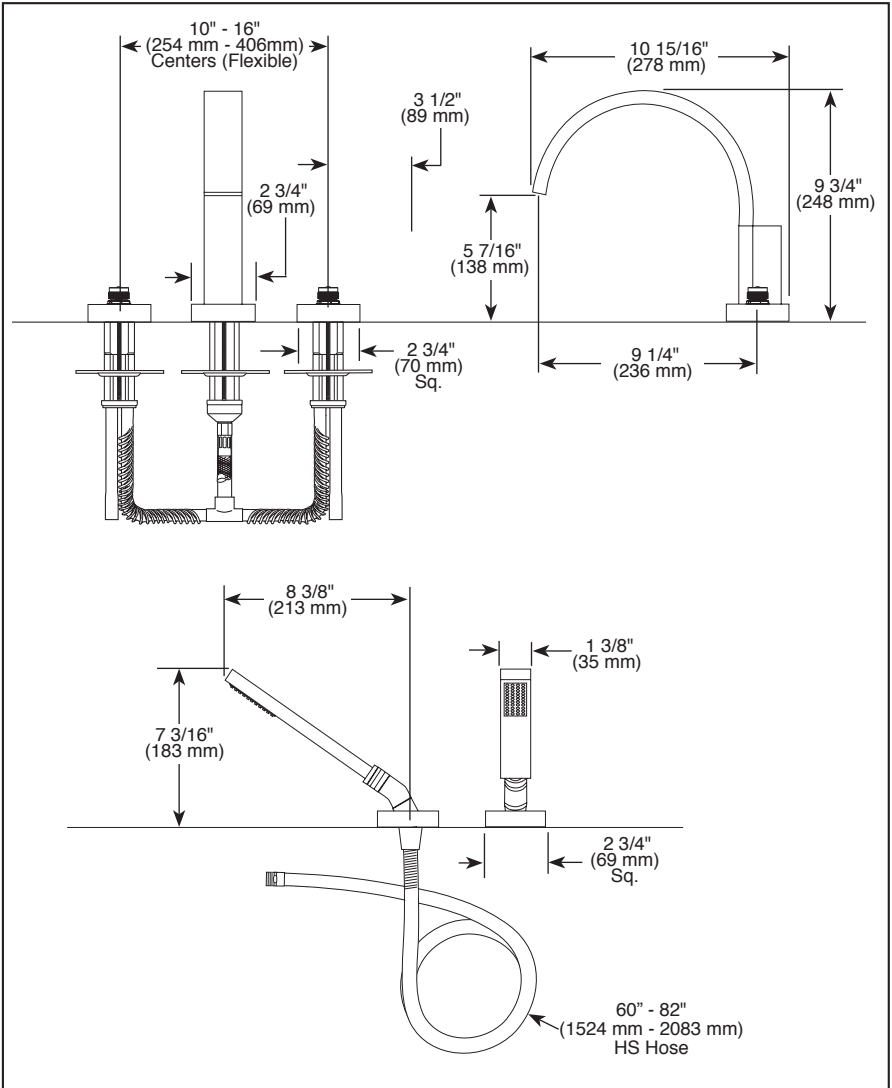

# BRIZO®

## ROMAN TUB/WHIRLPOOL FAUCET TRIM


- Siderna® Bath Collection
- Three Hole Installation (T67380)
- Four Hole Installation (T67480)
- Rough-In Kit Must Also be Ordered to Complete Installation (R64707 for four hole and R62707 for three hole)

- STANDARD SPECIFICATIONS:**
- Trim Only for two handle Roman Tub faucet for concealed mounting.
  - 10 15/16" (278 mm) long, 9 3/4" (248 mm) high slip-on rigid spout.
  - Temperature and volume controlled with handles.
  - Rough-In kit must also be ordered to complete installation (R64707 for four hole and R62707 for three hole). There are separate specification sheets on each rough-in kit if more details are required.
  - Handshower includes double check valves for backflow prevention (T67480 & T67481).
  - Handshower maximum 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
  - Minimum 5" (127 mm) to maximum 8" (203 mm) distance between holes.
  - Accomodates up to 2 1/2" deck thickness.
  - Handles sold separately.
  - 60" - 82" (1524 mm - 2083 mm) stretchable finished metal hose.


- WARRANTY**
- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
  - 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



- COMPLIES WITH:**
- ASME A112.18.1 / CSA B125.1
  - ☑ Indicates compliance to ICC/ANSI A117.1 - Valve control only
  - EPA WaterSense® - Applies to handshower only - RP63768\*

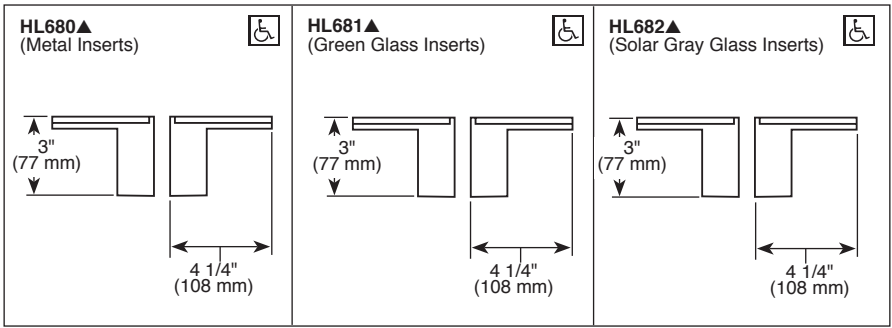

▲ Designate proper finish suffix

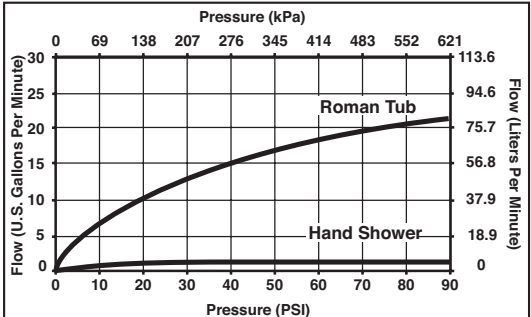

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.  
 BSP-B-T67380-LHP Rev. G