

Installation manual for: 2800G52

Dimensions:D52" H54" L40+1 Collection:Maria Theresa

Bulb Type:E12 bulb not included

Lamp Frame Weight(1bs):84
Total Weight(1bs):180



Thank you for choosing our product(s).

Our Company is actively involved in every step of the production.

Our product(s) are designed to be utilized for every application that graces your home or business.

We pride ourselves in providing the most prompt and courtesy service to all of the valued customers.

Please find the enclosed detailed instruction and read carefully for proper installation.

If you have any questions, please contact the retailer where the purchased was made.



SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF. BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.


CAUTION

- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit: 110 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.

Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions, where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued customers.

Frame Parts List

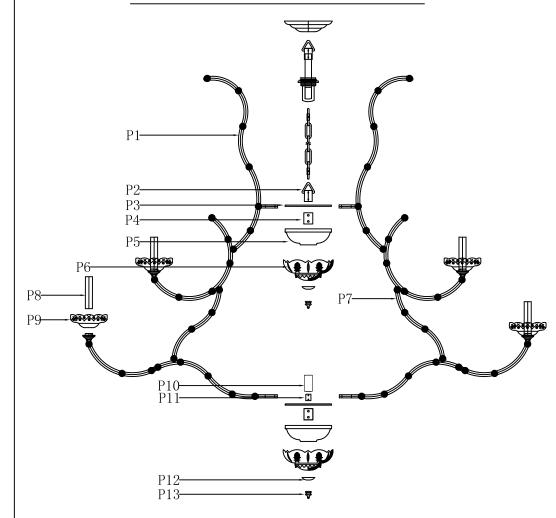

2800G52 D52" H54" L40+1

Step 1
Please use the parts list to ensure you are not missing any parts

2800G52

PARTS LIST

part	picture	Description	Parts Number	Qty	Check list	
ZA		4"Crossbar		1		
ZB		ø 6"Canopy	CP10R60L3	1		
ZC		Canopy ring		1		
ZD		L59"Chain06T Twist Design	Chain06T	1		
ZE	~~	Power Cord 12' SPT-2-16# Clear/Gold		1		
P1	Sen	glass arm 39.8"		5		
P2		Loop		1		
P3		Metal plate		2		
P4	0 0	Big connector		2		
P5		Cover		2		
Р6		glass dish 7"	GD1005A70CL GD1005A70GT	2		
P7	کری	glass arm 40"	ARM10280040	5		
P8		4"Metal tube		40		
P9		glass dish 4.5"	GD1003G45CL GD1003G45GT	40		
P10		Metal Lampholder		1		

2800G52 D52" H54" L40+1

part	picture	Description	Parts Number	Qty	Check list
P11	0	Coupling		1	
P12	D	Cover		2	
P13	₩	Finial		2	
A	*	1050-14#*2+911-2.5"		10	
В	\$	1050-14#*1+911-2.5"		10	
С	\$	1050-14#*1+911-2.5"		15	
D	&	1050-14#*1+911-2.0"		200	
E	\$	1050-14#*2+911-3.0"		20	
F	.	1050-14#*2+911-3.0"		20	
G	•	1050-14#*6+911-3.0"		10	
Н		1050-14#*9+911-3.0"		10	
Ι	*	1050-14#*9+911-3.0"		10	
J		1050-14#*9+911-3.0"		10	


part	picture	Description	Parts Number	Qty	Check list
K		1050-14#*10+911-3.0"		10	
L	&	1050-14#*5+1053-14#*1 1050-14#*5+1050-14#*7 +911-2.5"		10	
M	•	1050-14#*6+1053-14#*1 1050-14#*6+1050-14#*4 +911-2.5"		10	
N	¥	1050-14#*6+1053-14#*1 1050-14#*6+1050-14#*1 +911-2.5"		10	
0	¥	1050-14#*5+1053-14#*1 1050-14#*5+1050-14#*1 +911-2.5"		20	
Р	*	1050-14#*5+1053-14#*1 1050-14#*5+1050-14#*1 +911-2.5"		15	
Q	•	1050-14#*4+1053-14#*1 1050-14#*4+1050-14#*1 +911-2.5"	1 <i>1</i>	10	
R	•	1050-14#*3+1053-14#*1 1050-14#*3+1050-14#*1 +911-2.5"		10	
S	****	1050-14#*5+1053-14#*1 1050-14#*5+1050-14#*1 +911-2.5"		10	
Т	*	1050-14#*8+701-50#		1	
U	*	1050-14#*16+701-50#		1	
U		1000 11#10.101 00#		1	

2800G52 D52" H54" L40+1

part	picture	Description	Parts Number	Qty	Check list

Step 2


Canopy Installation Instruction

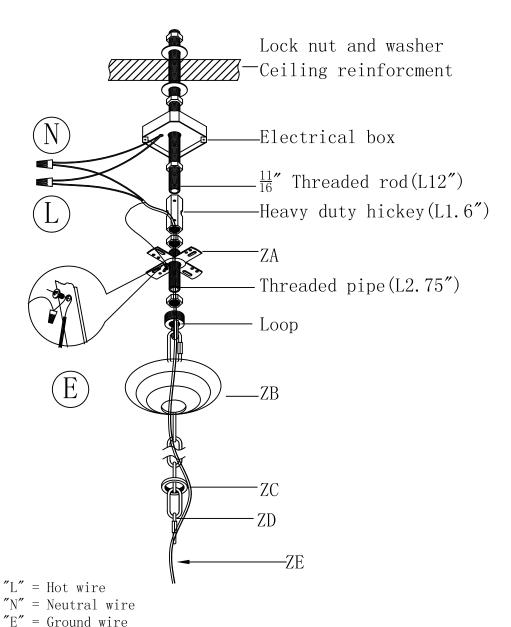

IMPORTANT: Test sockets with bulb before dressing the fixture.

- 1 .Drill a $\phi 0.7''$ hole in the ceiling reinforcment to allow a $^{11}\!\!/_{16}''$ threaded rod to pass through. 2 .Attach the electrical box to the ceiling reinforcment
- 2 .Attach the electrical box to the ceiling reinforcment and pass the ${}^{1}\!\!/_{\!16}$ threaded rod through the box and secure it to the heavy duty hickey.
- 3 . Pass the fixture wires and ground wire through the loop, canopy ring, center hole of canopy and the heavy duty hickey.
- 4 .Pull ceiling wires down through the fixture box and make connection.
- 5 . Screw loop only onto threaded pipe.
- 6 . Hang the fixture on chain.
- 7 . Secure the canopy with canopy ring.

Frame Assembly Diagram

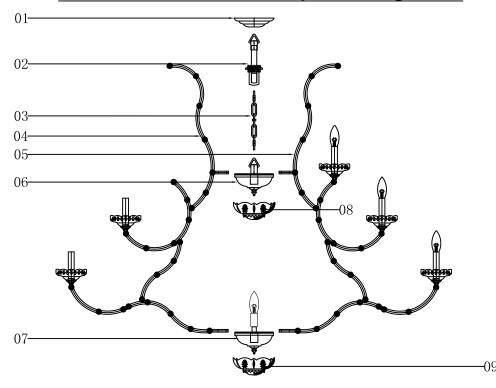


Lamp body (06)
part list

A1-steel plate

A2-cover

A3-cover

A4-tower shaped



2800G52 D52" H54" L40+1 Step 3

Frame Assembly Instructions

Installation:

Please read all instructions carefully.
Before you proceed to install, make sure.
that the power supply is turned off and
remains off until installation is complete.
Please note that each part has been assigned a number.
Please proceed in a numerical order.


- 1. Fix the crossbar to the junction box to the ceiling.
- 2. Unscrew the loop of the threaded pipe (02), hang the canopy cover (01) into the threaded pipe (02) with ring.
- 3. Screw the pipe (02) at the crossbar of the heave duty hickey.
- 4. Hang the chain (03) on the pipe (02) of the end of the loop with the safe lock.
- 5. Break up the lamp body (06) A1 A4 and lamp body (07) B1 B4.
- 6. Unscrew the M5 screws of the steel plate(A1, B1), assemble the lamp arm(05,06) on the steel plate(A1, B1), fix them with the M5 screws.
- 7. Connect the wires on the lamp body (07), pull the one of the wire to the lamp body (06), connect it with the main wire at the lamp body (06).
- 8. Assemble the lamp body (06), add the glass dish (06) on it with the tower shaped (A4), assemble the lamp body (07), add the glass dish (09) on it with tower shaped (B4).
- 9. Hang the fixture on the chain(03) the end of the safe lock, pull the main wire pass the chain(03) to the junction box then connect wires correctly.
- 10. Pull up the steel wire through the lamp body arrive the Mounting bracket the fix it.
- 11. Fix the canopy cover (01) to the ceiling with the ring.
- 12. As the crystal dressing instruction, hang the crystal parts.

Step 4 Crystal Dressing Instructions

- 1. Hang crystal "A"、"B"、"C"、"D"、"E"、"F"、"G"、"H"、"I"、"J"、"K"、"R"、"T"、"U".
- 2. Connect both ends of S with A. Connect both ends of Q with B. Connect both ends of P with C. Connect both ends of O with E. Connect both ends of N with F. Connect both ends of M with G. Connect both ends of L with H.

Crystal Dressing Diagram

When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.

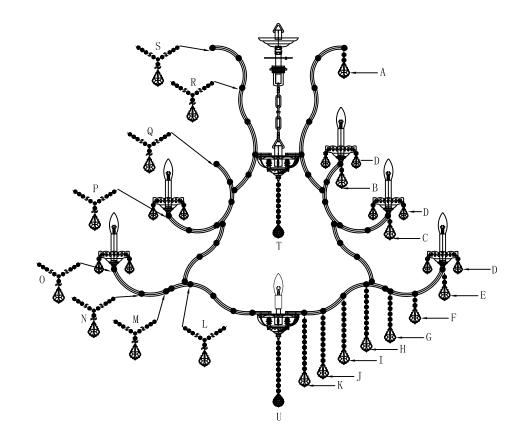

Congratulations!

You are now done installing your Elegant Lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

Thank you.

Cleaning and Maintenance of Chandelier Frame
The finish on our chandelier frames and fixture
frames is protected by a durable coating of
lacquer. To clean, use a clean soft, dry cloth. Do
not use any metal polishes, cleaners, abrasives
or any substance which could remove the
protective finish. Failure to follow these
instructions automatically voids the guarantee.

Cleaning and Maintenance of Crystals Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

To Order Crystal Replacement Parts
Should you require replacement crystals or pins
(the metal connectors attaching the crystals),
contact the store where the product was
purchased. For ease of ordering, you may use the
original crystal trimming instructions provided
with this product and circle the items you wish
to order, indicating the quantity by writing the
number needed adjacent to the circle. You will
be contacted with prices prior to shipment. All
orders must be pre-paid.

Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of one (1) year from the date of purchase. Our company will, at its option, repair or replace any frame that has a defect in the materials or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department. A written return authorization form will be sent to you with specific instructions.

Returns and Conditions of Warranty

Returns must be pre-authorized by contacting the retailer where you made your purchase.. Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reseserve the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warrantee, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.