

Installation manual for 3503G5LBK

Dimensions: D25.6" H39"

Collection : Monroe

Bulb Type: LED PCB 103.5W 3000K

Lamp Weight: 56.8LBS Total Weight: 62.3LBS



Thank you for choosing our product(s).

Our Company is actively involved in every step of the production.

Our product(s) are designed to be utilized for every application that graces your home or business.

We pride ourselves in providing the most prompt and courtesy service to all of the valued customers.

Please find the enclosed detailed instruction and read carefully for proper installation.

If you have any questions, please contact the retailer Where the purchased was made.



SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF. BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.

CAUTTON

- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit: 110 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.


Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions.

where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued customers.

3503G5LBK D25.6" H39"

Frame Assembly Diagram

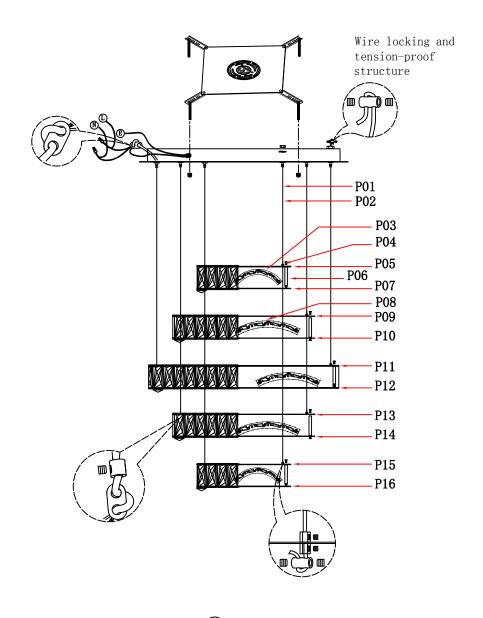

Step 1

Please use the partslist to ensure you are not missing any parts.

PARTS LIST

Parts number	Picture	Description	Qty	Diagram number
MB9R33		Ceiling Plate	1	ZA
		canopy	1	ZB
P-3503G5LBK-1		connector	16	ZC
		M5 screw cap	4	ZD
	Q	ssl 2*24# ø 3.6mm electric wire	2	P01
	Q	ssl 2*24#ø3.6mm electric wire	1	P02
	Section 1	4W high voltage LED PCB	3	P03
P-3503G5LBK-2		D8*H8 wire fixer	3	P04
		D10.7"upside iron slice	1	P05
		2.4" metal pipe	6	P06
	0	D10.7"downside S.S slice	1	P07
	Q	ssl 2*24# ø 3.6mm electric wire	2	P01
	Q	ssl 2*24#Ø3.6mm electric wire	1	P02
P-3503G5LBK-3		4W high voltage LED PCB	5	P08
		D8*H8 wire fixer	3	P04
		D17.7"upside iron slice	1	P09

3503G5LBK D25.6" H39"


Parts number	Picture	Description	Qty	Diagram number
P-3503G5LBK-3		2.4" metal pipe	10	P06
	0	D17.7"downside S.S slice	1	P10
	Q	ssl 2*24# ø 3.6mm electric wire	3	P01
	Q	ssl 2*24# Ø 3.6mm electric wire	1	P02
P-3503G5LBK-4	Consolination of the second	4W high voltage LED PCB	7	P08
		D8*H8 wire fixer	4	P04
		D23.6"upside iron slice	1	P11
		2.4" metal pipe	14	P06
	0	D23.6 downside S.S slice	1	P12
P-3503G5LBK-5	Q	ssl 2*24# ø 3.6mm electric wire	2	P01
	0	ssl 2*24#Ø3.6mm electric wire	1	P02
	Con Constant	4W high voltage LED PCB	5	P08
		D8*H8 wire fixer	3	P04
		D17.7"upside iron slice	1	P13
		2.4" metal pipe	10	P06
	0	D17.7"downside S.S slice	1	P14
P-3503G5LBK-6	Q	ssl 2*24# ø 3.6mm electric wire	2	P01
	Q	ssl 2*24#Ø3.6mm electric wire	1	P02
	Processor .	4W high voltage LED PCB	3	P03

Parts number	Picture	Description	Qty	Diagram number
P-3503G5LBK-6		D8*H8 wire fixer	3	P04
		D10.7"upside iron slice	1	P15
		2.4" metal pipe	6	P06
	0	D10.7"downside S.S slice	1	P16
RC620-3-CL		1.2"*3"crystal	337	A
RC2020-30-CL	\boxtimes	1. 2"*1. 2"crystal	138	В

3503G5LBK D25.6" H39"

Step 2

Canopy Installation Instruction

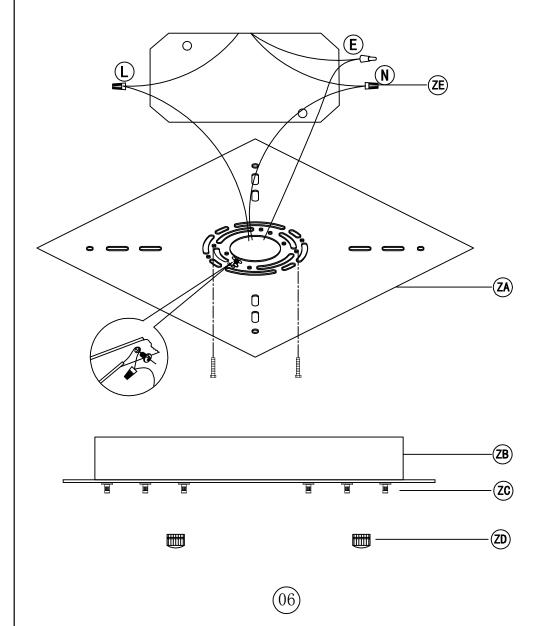

IMPORTANT: Test sockets with bulb before dressing the fixture.


- 1. Use two screws (ZG) to fix the Ceiling Plate (ZA) on the ceiling; which are not supplied and should already be in your box.
- 2. Be sure when connecting the wire use electrician approved junction caps (ZE).
- 3. Stow the excess wire in the canopy (ZB).
- 4. Align the canopy (ZB) with the hanging plate screw (ZE), fix the lamp on the ceiling, tighten and fix it with a M5 screw cap (ZD).
- 5. If you need to cut the wire, please find the label "L=Black wire" L=Black wire" (1) to (5) on N=White Wire

the canopy (ZB), it is the main line of power. After adjusting the wires, please use them to connect the "N" and "L" wires to power.

3503G5LBK D25.6" H39"

Step 3

Frame Assembly Diagram

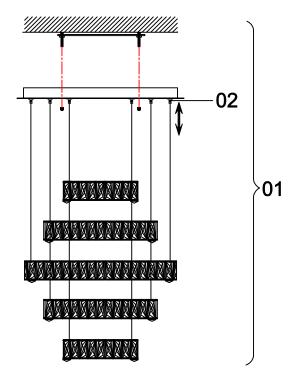


Frame Assembly Instructions


Installation:

Please read all instructions carefully. Before you proceed to install, make sure that the power supply is turned off and remains off until installation is complete. Please note that each part has been assigned a number. Please proceed in a numerical order.

- 1. Fixed the Ceiling Cover on the Mounting Bracket, then put the screws tightened.
- 2. Please unscrew the connector (02) of the expansion part before adjusting the line, and then screw on the cap after adjusting the line.

Crystal Dressing Diagram





Congratulations!

You are now done installing your Elegant Lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

Thank you.

3503G5LBK D25.6" H39"

Cleaning and Maintenance of Chandelier Frame
The finish on our chandelier frames and fixture
frames is protected by a durable coating of
lacquer. To clean, use a clean soft, dry cloth. Do
not use any metal polishes, cleaners, abrasives
or any substance which could remove the
protective finish. Failure to follow these
instructions automatically voids the guarantee.

Cleaning and Maintenance of Crystals Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

To Order Crystal Replacement Parts
Should you require replacement crystals or pins
(the metal connectors attaching the crystals),
contact the store where the product was
purchased or contact us. For ease of ordering,
you may use the original crystal trimming
instructions provided with this product and
circle the items you wish to order, indicating
the quantity by writing the number needed
adjacent to the circle. You will be contacted
with prices prior toshipment. All orders must be
pre-paid.

Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of one (1) year from the date of purchase. Our company will, at its option, repair or replace any frame that has a defect in the materials or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department. A written return authorization form will be sent to you with specific instructions.

3503G5LBK D25.6" H39"

Returns and Conditions of Warranty

Returns must be pre-authorized by contacting our customer service department . Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reseserve the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warrantee, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.