## **UVING** ISTRICT

Collection:Trey

Installation manual for:

LD641D36 D36"H20" L6

## Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4.Secure mounting bracket to the junction box.

5.Insert screws (P2) in side of top unit the mounting bracket(P1).

6.Put the lamp arm (P15) to the corresponding position.


7.Screw the middle rod (P10) to the lamp body then connect to the chain (P8) and connect the canopy lock (P7) tighten.

8.Put the canopy (P3) on the nipple (P4) and connect the canopy lock (P7),

then use the canopy ring (P6) to screw tighten.

9.Install E12 light source, no include bulb.



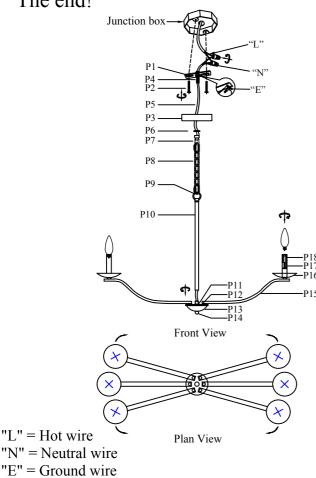

part	picture	Description	Qty	Check list
P1	<b>—</b> •••	L4" Mounting bracket	1	
P2		5/32-32 Screw	2	
Р3		D4.7" Canopy plat	1	
P4		Nipple	1	
Р5	$\sim$	Power Cord 8.5',18AWG, SPT-1 Gold/Black	1	
P6		Canopy ring	1	
P7	Ð	Canopy lock	1	
P8	-0000-	L5'CHAIN04P Plain Design	1	
Р9	Q	D1.5" Loop	1	
P10		D0.63"*L16" ROD	1	
P11	0	Washer	1	
P12		D3.94"Around metal plate	1	
P13	$\overline{\frown}$	D4" Receiver bowl	1	
P14	0	Cap nut	1	
P15		L15.75" Arm	6	
P16		D4.33" Receiver bowl	6	
P17		D0.87"*L4.1" Candle cover	6	
P18	<b>E</b>	E12 Socket	6	

## PARTS LIST