# **KOHLER**<sub>®</sub>

### Kingston<sup>™</sup> Comfort Height®

Two-piece elongated 1.28 gpf chair height toilet K-25077-SSTR

#### Features

- Ideal for commercial installations.
- Antimicrobial finish inhibits the growth of mold-, mildew-, stain-, and odor-causing bacteria on the fixture surface. This product does not protect users against bacteria, viruses, or other disease organisms. Always clean and wash this product thoroughly before and after each use.
- Two-piece design.
- Elongated bowl offers added room and comfort.
- 1.28 gpf (4.8 lpf).
- Durable metal right-hand Polished Chrome trip lever.
- 2-1/8" (54 mm) fully glazed trapway.
- Tank cover locks included.
- Easy-to-service silicone seal.
- Sanitary guard where bowl and tank meet for ease of cleaning.
- Encapsulated bolts prevent rust and corrosion.
- Combination consists of the K-25076-SS bowl and K-25100-TR tank.

#### Technology

- Single-flush gravity uses the force of gravity and a precisionengineered tank, bowl, and trapway to create a strong siphon during flushing.
- Class Five® flushing technology offers virtually plug-free performance and rinsing power for a clean bowl.
- Class Five® canister allows water to flow out of the tank from all sides (360 degrees), increasing the power and effectiveness of the flush.
- Flush valve's 3:2 ratio harnesses the natural force of gravity and optimizes flush performance.
- Durable canister design has 90% less exposed seal material than a 3" flapper for leak-free performance.

#### Installation

- Three-bolt quick-connect installation.
- Standard 12" (305 mm) rough-in.
- Seat and supply line sold separately.

#### **Recommended Products/Accessories**

K-7637 Angle Supply with Stop (single) K-20110 Brevia<sup>™</sup> Quiet-Close<sup>™</sup> Elongated Toilet Seat K-4650-A Lustra<sup>™</sup> Elongated Toilet Seat K-5420 Low-Profile Bolt Caps K-23726 Drain treatment

#### Included Components

Product consists of: K-25076-SS Elongated chair height toilet bowl K-25100-TR Toilet tank with cover locks, 1.28 gpf Additional Components:

1-800-4KOHLER (1-800-456-4537) Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current Specification Sheet, go to <u>www.kohler.com</u>. 5-29-2021 17:30 - US/CA





#### **Codes/Standards**

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

## KOHLER<sup>®</sup> Toilets and Seats Limited Warranty

See website for detailed warranty information.

#### **Available Colors/Finishes**

Color tiles intended for reference only.

#### **Color Code Description**


0 White





## Kingston™ Comfort Height®

Two-piece elongated 1.28 gpf chair height toilet K-25077-SSTR

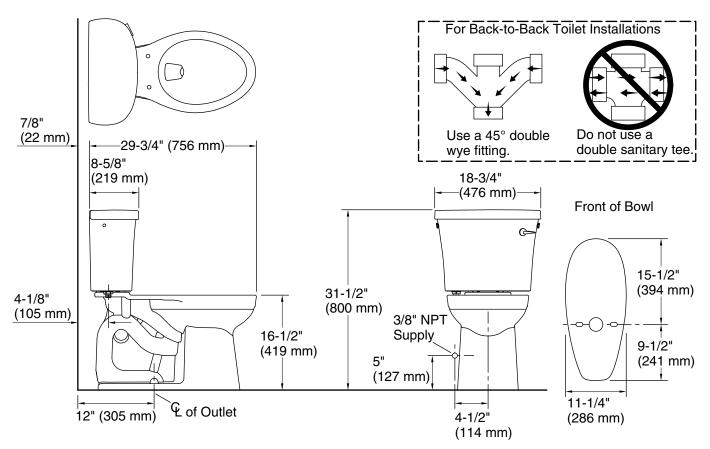

#### **Technical Information**

All product dimensions are nominal.	
Two-piece, Floor-mount	
Floor	
Elongated	
Gravity siphon jet	
2-1/8" (54 mm)	
1.28 gpf (4.8 lpf)	
10-5/8" x 6-15/16" (269 mm x 176 mm)	
5-5/8" (143 mm)	
12" (305 mm)	
5-1/2" (140 mm)	

minal

#### Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

