

Features

- Two-piece design.
- Elongated bowl offers added room and comfort.
- 1.28 gpf (4.8 lpf).
- 2-1/8" (54 mm) fully glazed trapway.
- Left-hand Polished Chrome trip lever.
- Tank cover locks included.
- Combination consists of the K-4841-T tank and the K-4198 bowl.
- Coordinates with other products in the Wellworth collection.

Technology

- Single-flush gravity uses the force of gravity and a precisionengineered tank, bowl, and trapway to create a strong siphon during flushing.
- KOHLERs canister flush valve harnesses the natural force of gravity and optimizes flushing performance.
- Class Five® flushing technology offers virtually plug-free performance and rinsing power for a clean bowl.

Installation

- Three-bolt quick-connect installation.
- Seat and supply line sold separately.

Water Conservation & Rebates

• Eligible for consumer rebates in some municipalities.

Recommended Products/Accessories

K-4636 Cachet® Quiet-Close™ Elongated Toilet Seat K-5588 Purefresh® Elongated Toilet Seat K-4108 C³®-230 Elongated bidet toilet seat K-5420 Low-Profile Bolt Caps K-9379 Trip Lever 1023457 Wax Ring/Hardware Kit 1265114 Connector Hose K-23726 Drain treatment

Included Components

Product consists of: K-4198 Elongated Bowl K-4841-T Toilet tank with cover locks, 1.28 gpf Additional Components: Bolt cap accessory pack Tank accessory pack Tank cover Trip lever





Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC)

KOHLER[®] Toilets and Seats Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

0

96 Biscuit7 Black Black[™]

White




Wellworth®

Two-piece elongated 1.28 gpf toilet K-3948-T



Wellworth® Two-piece elongated 1.28 gpf toilet K-3948-T

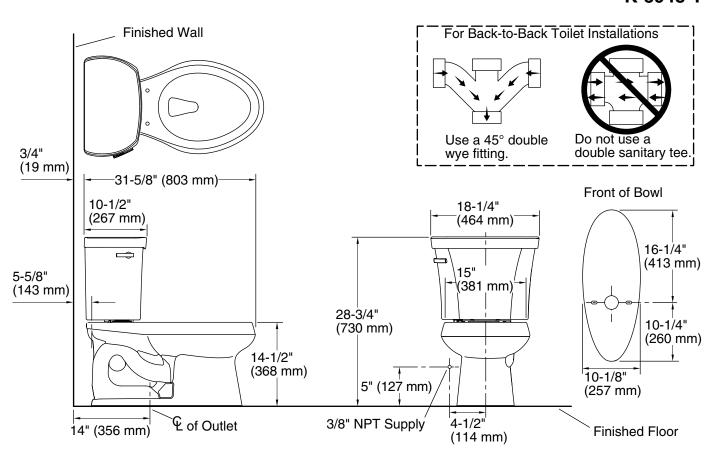

Technical Information

All product dimensions are nominal.	
Toilet type:	Two-piece, Floor-mount
Waste Outlet:	Floor
Bowl shape:	Elongated
Flush type:	Class Five®
Trap passageway:	2-1/8" (54 mm)
Water Consumption	
Full:	1.28 gpf (4.8 lpf)
Water surface size:	11-1/4" x 8-1/4" (286 mm x 210 mm)
Rim to water	5-1/4" (133 mm)
surface:	
Rough-in:	14" (356 mm)
Seat-mounting	5-1/2" (140 mm)
holes:	

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

