

66-15/16" freestanding bath w/Brilliant Blanc base K-819-F62

Features

- Freestanding design creates a striking focal point in your bathing area.
- Integral lumbar support on both ends.
- Safeguard® slip-resistant surface on bath floor.
- Slotted overflow allows for deep soaking.
- Center toe-tap drain.
- Includes one wooden pedestal base, four cast iron adjustable feet, and one wooden overflow/drain shroud.
- Coordinates with other products in the Rêve collection.

Material

- KOHLER® enameled cast iron.
- Painted exterior.
- Wood composite pedestal base with Brilliant Blanc painted finish.

Installation

Freestanding.

Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

Recommended Products/Accessories

K-1491 Bath/Whirlpool Pillow

K-1601 Bath/whirlpool footstop, removable

K-23726 Drain treatment

K-23725 Cast iron cleaner

Included Components

Additional Components:

Cast iron adjustable feet (set of 4)

Wooden Float

wooden overflow/drain shroud



Codes/Standards

ASME A112.19.1/CSA B45.2 ASTM F462

KOHLER® Enameled Cast Iron Bath and Shower Base Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description


0 White





66-15/16" freestanding bath w/Brilliant Blanc base K-819-F62

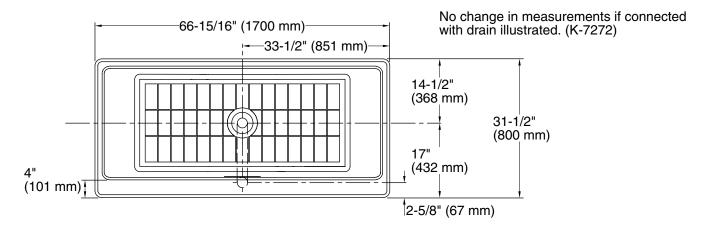

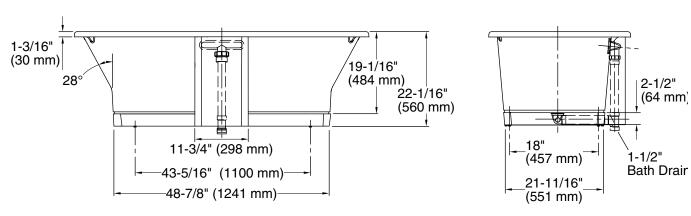

Technical Information

All product dimensions are nominal.

Installation: Freestanding

Drain location: Center

Basin area, bottom: 49" x 22" (1245 mm x 559 mm)

Basin area, top: 62-1/2" x 24-3/4" (1588 mm x 629 mm)

Weight: 365 lbs (165.6 kg)

Minimum floor load: 70 lbs/ft² (341.8 kg/m²)

Water depth: 15-1/4" (387 mm)

Water capacity: 15-1/4" (387 mm

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will



