

### **CODE NUMBER**

3365333BT

### DESCRIPTION

8" Trim Plate, Box Transformer Power Supply, Back-Check Tee, Polished Chrome Finish, 0.5 gpm, Multi-Laminar Spray, Infrared Sensor, Optima® Hardwired-Powered Deck-Mounted Low Integrated Base Body Faucet.

### **DETAILS**

• Flow Rate: 0.5 gpm (2 Lpm) (0.5GPM) • Spray Type: Multi-Laminar (MLM)

 Sensor Type: Infrared (IR) Mounting Type: 4" Centerset () • Trim Plate: 8" (203mm) (8)

• Power Supply: Box Transformer (BOX) • Temperature Mixer: Back-Check Tee (TEE)

• Finish: Polished Chrome (CP) • Factory Default Timeout: 30s • Factory Default GPC: 0.25

### **FEATURES**

Commercial Grade Faucet, ADA Compliant, Cast Brass Spout, Quick Connect Fittings, Integrated Water Shut-off, Wireless Settings Adjustment, On-demand or Metered activation, Hygienic Line Flush, Water Usage and Battery Strength Reporting, Self-adapting Sensor

### **ELECTRICAL SPECIFICATIONS**

• Battery Life: 3 years 8,000 cycles/month o Optional power harvesting significantly extends service life

• Sensor Range: 4"-5" (102-127mm) • Timeout Adjustment Settings: 30s

### **POWER SUPPLY OPTIONS**

- 6VDC Ganged Adapter Kit (up to 6 units)(sold separately)\*
- 6VDC Plug Adapter (included with PLG models)
- 24VAC Box Transformer (included with BOX models)
- \* when converting units to hardwired with battery back-up

### **VIDEOS**

Sloan Connect App®


Sloan Optima Below Deck Faucet

**PVD Special Finishes** 

### **DOWNLOADS**

- Optima Smart Faucet Below Deck Installation Instructions
- Trim Plate Guide
- Faucet Spray Heads Repair and Maintenance Guide
- ETF-600/EBF-650 Below Deck Repair and Maintenance Guide
- Additional Downloads





### **COMPLIANCES & CERTIFICATIONS**

































(ADA Compliant, ASME A112.18.1 Compliant, CalGreen Compliant, CEC Compliant, cUPC Certified, UL Certified, UPC Certified, UPC Low Lead Compliant, cUPC Low Lead Compliant, EPD, HPD, LEED Materials & Resources EPD Credit, LEED Materials & Resources HPD Credit, NYC604.4, Proposition 65, Satisfies LEED Credits, TAS, WELL Building Standard)

# RECOMMENDED SPECIFICATION

Faucet shall include cast brass body, quick-connect fittings, twist-off/shut-off solenoid assembly, removable battery cartridge, flexible power supply and allow adjustment of settings wirelessly via Apple or Android smartphones.

# NOTES

All information contained within this document subject to change without notice.

Looking for other variations of the ETF-600 product? View the general spec sheet with all options.

Find a matching soap dispenser for this faucet.






Find a compatible sink for this faucet.

WARRANTY

3 Year



# **ROUGH-IN**

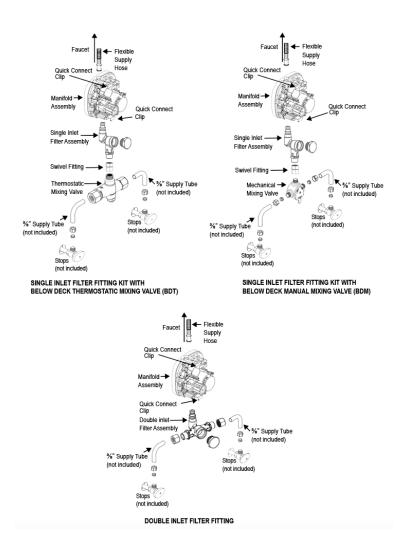

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com