

OPTIONS**Flush Volume**

- 1.0 gpf (3.8 Lpf) (1.0)
- 0.5 gpf (1.9 Lpf) (0.5)
- 0.125 gpf (0.5 Lpf) (0.125)
- 1.5 gpf (5.7 Lpf) (1.5)
- 0.25 gpf (0.9 Lpf) (0.25)
- 3.5 gpf (13.2 Lpf) (3.5)

Water Efficiency

- High Efficiency
- Low Consumption
- Water Saver

Bypass

- Dual-Filtered Bypass (DBP)
- Dual-Filtered Fixed Bypass Diaphragm (DFB)

Handle

- Front of Valve (H)
- Sanigard® (SG)
- Nickel-Silver (YA)

Push Button

- Metal Index (L)

Control Stop

- Less (L/STOP)

Vacuum Breaker

- Less (XYV)

Offset

- 2" (51mm) (2-OFST)

Pipe Support

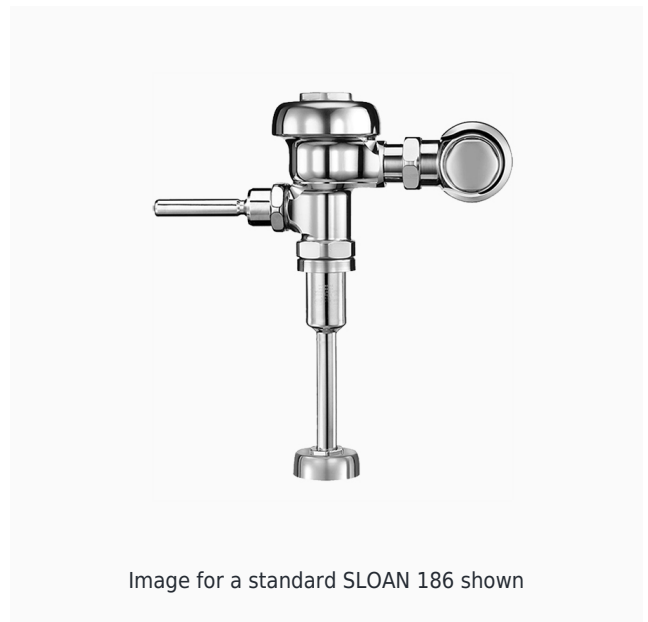
- Split Ring (YJ)

Special Features

- Less Logo (LL)

Compliances & Certifications

- BAA Compliant
- ADA Compliant
- cUPC Certified
- Satisfies LEED Credits
- WaterSense Listed
- EPD
- HPD
- UPC Certified

**DESCRIPTION**

Sloan® Exposed Manual Flushometer

FEATURES

- Flush volumes start as low as 1.0 gpf/3.8 Lpf
- Water conservation is aided by the ADA-compliant, non-hold-open handle, which prevents urinal from exceeding intended flush volume
- Flush accuracy is controlled by CID™ technology, also enhancing water efficiency
- Integrity of the product is maintained with the vandal-resistant stop cap
- Durability is facilitated with high copper, low zinc brass castings for dezincification resistance
- Adjustable tailpiece to accommodate different height requirements
- High chloramine resistant PERMEX synthetic rubber diaphragm with Linear Filtered Bypass and Vortex Cleansing Action
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

DOWNLOADS

- [Sloan Exposed Installation Instructions](#)
- [Sloan Exposed \(Spanish\) Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Sloan Flushometer Repair and Maintenance Guide](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

- [Additional Downloads](#)